

Fabas
NAVAL & MARINE LIGHTING

MADE IN ITALY



MARINE & OFFSHORE LED LIGHTING SOLUTIONS
Lighting engineered for the world's toughest applications


MORE THAN FORTY FIVE YEARS OF LIGHT

A STORY THAT BEGAN OVER 45 YEARS AGO.

A STORY THAT SPANS GENERATIONS. A STORY OF
TRADITION AND PASSION FOR WORK THAT STARTS
EARLY IN THE MORNING AND ENDS LATE AT NIGHT.

A STORY OF CREATIVE GENIUS AND INNOVATION.

A STORY THAT ALSO INVOLVES OUR CUSTOMERS,
SUPPLIERS AND ALL THE PEOPLE WHO HAVE
CONTRIBUTED TO MAKING FABAS LUCE GROW.

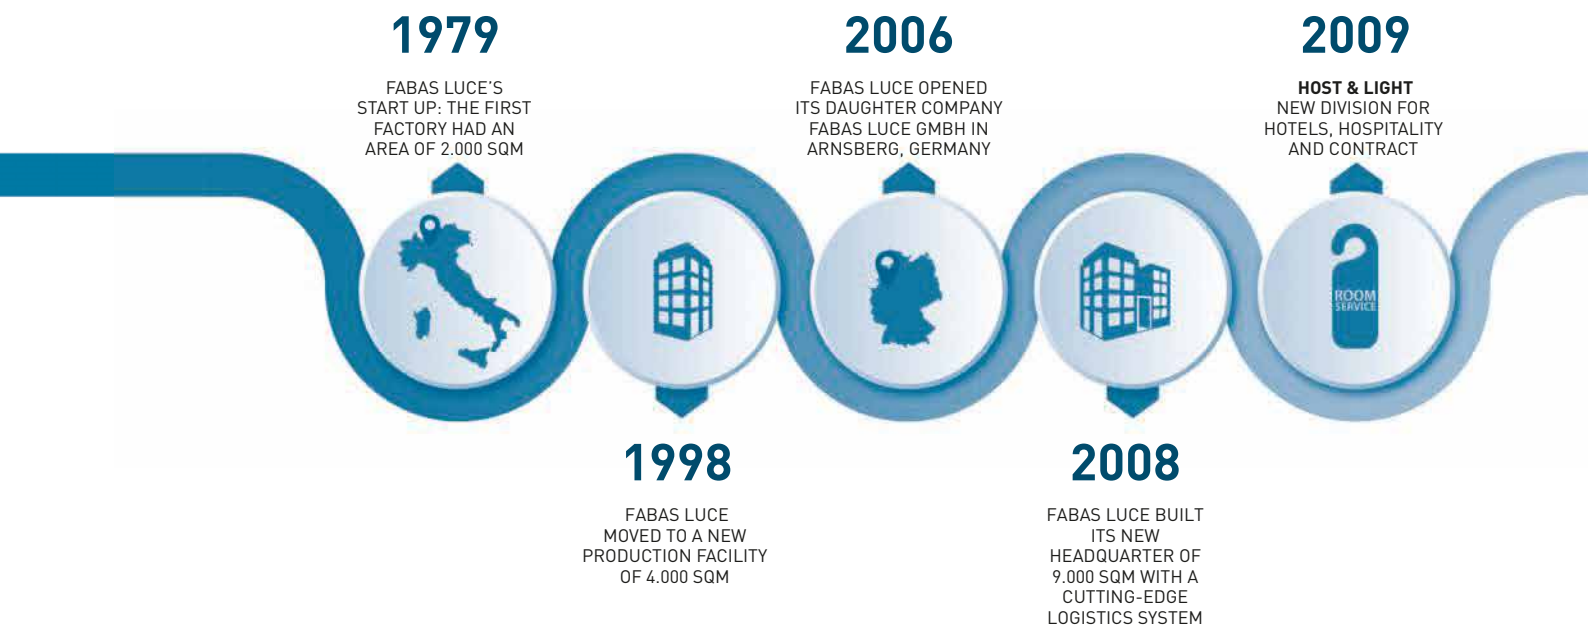


9.500 PALLETS OF
ITEMS IN THE
WAREHOUSE


9.000 SQ.M
OF COVERED
SURFACE AREA

620.000 ITEMS
DELIVERED
IN 2019

OLTRE 2.500 ITEMS MANAGED

50 COUNTRIES WHERE
WE ARE PRESENT
IN THE WORLD

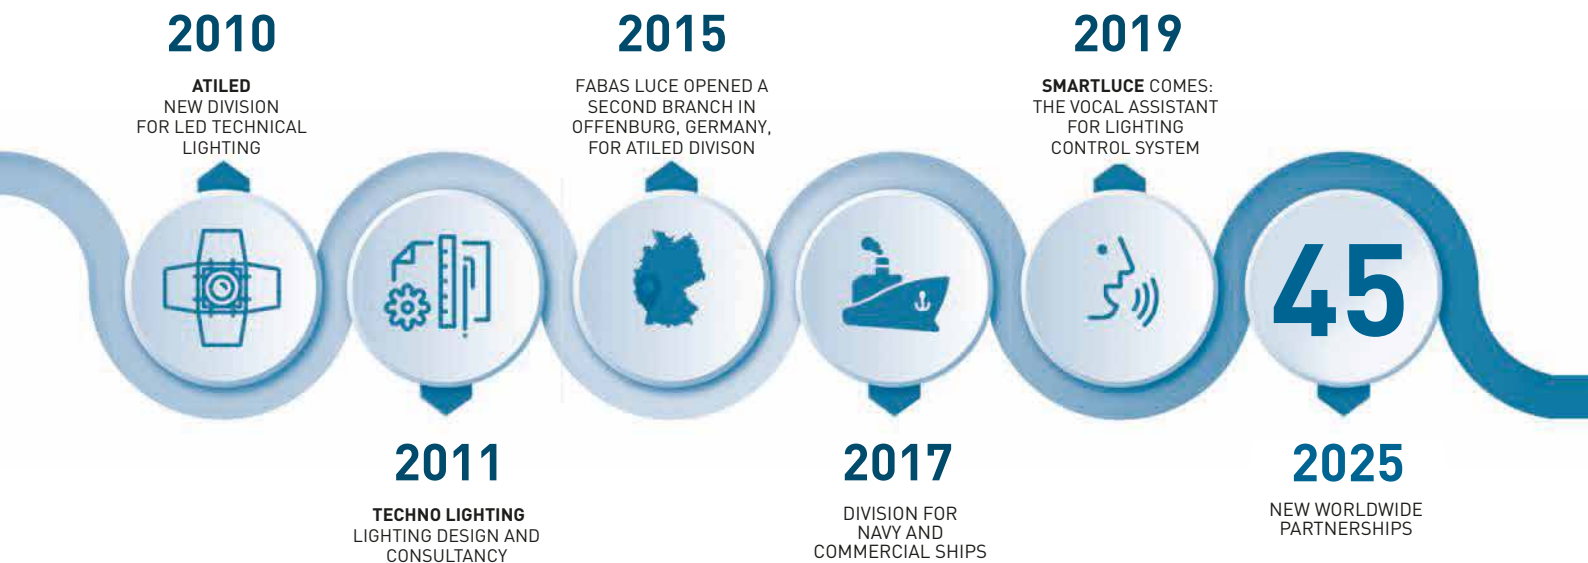

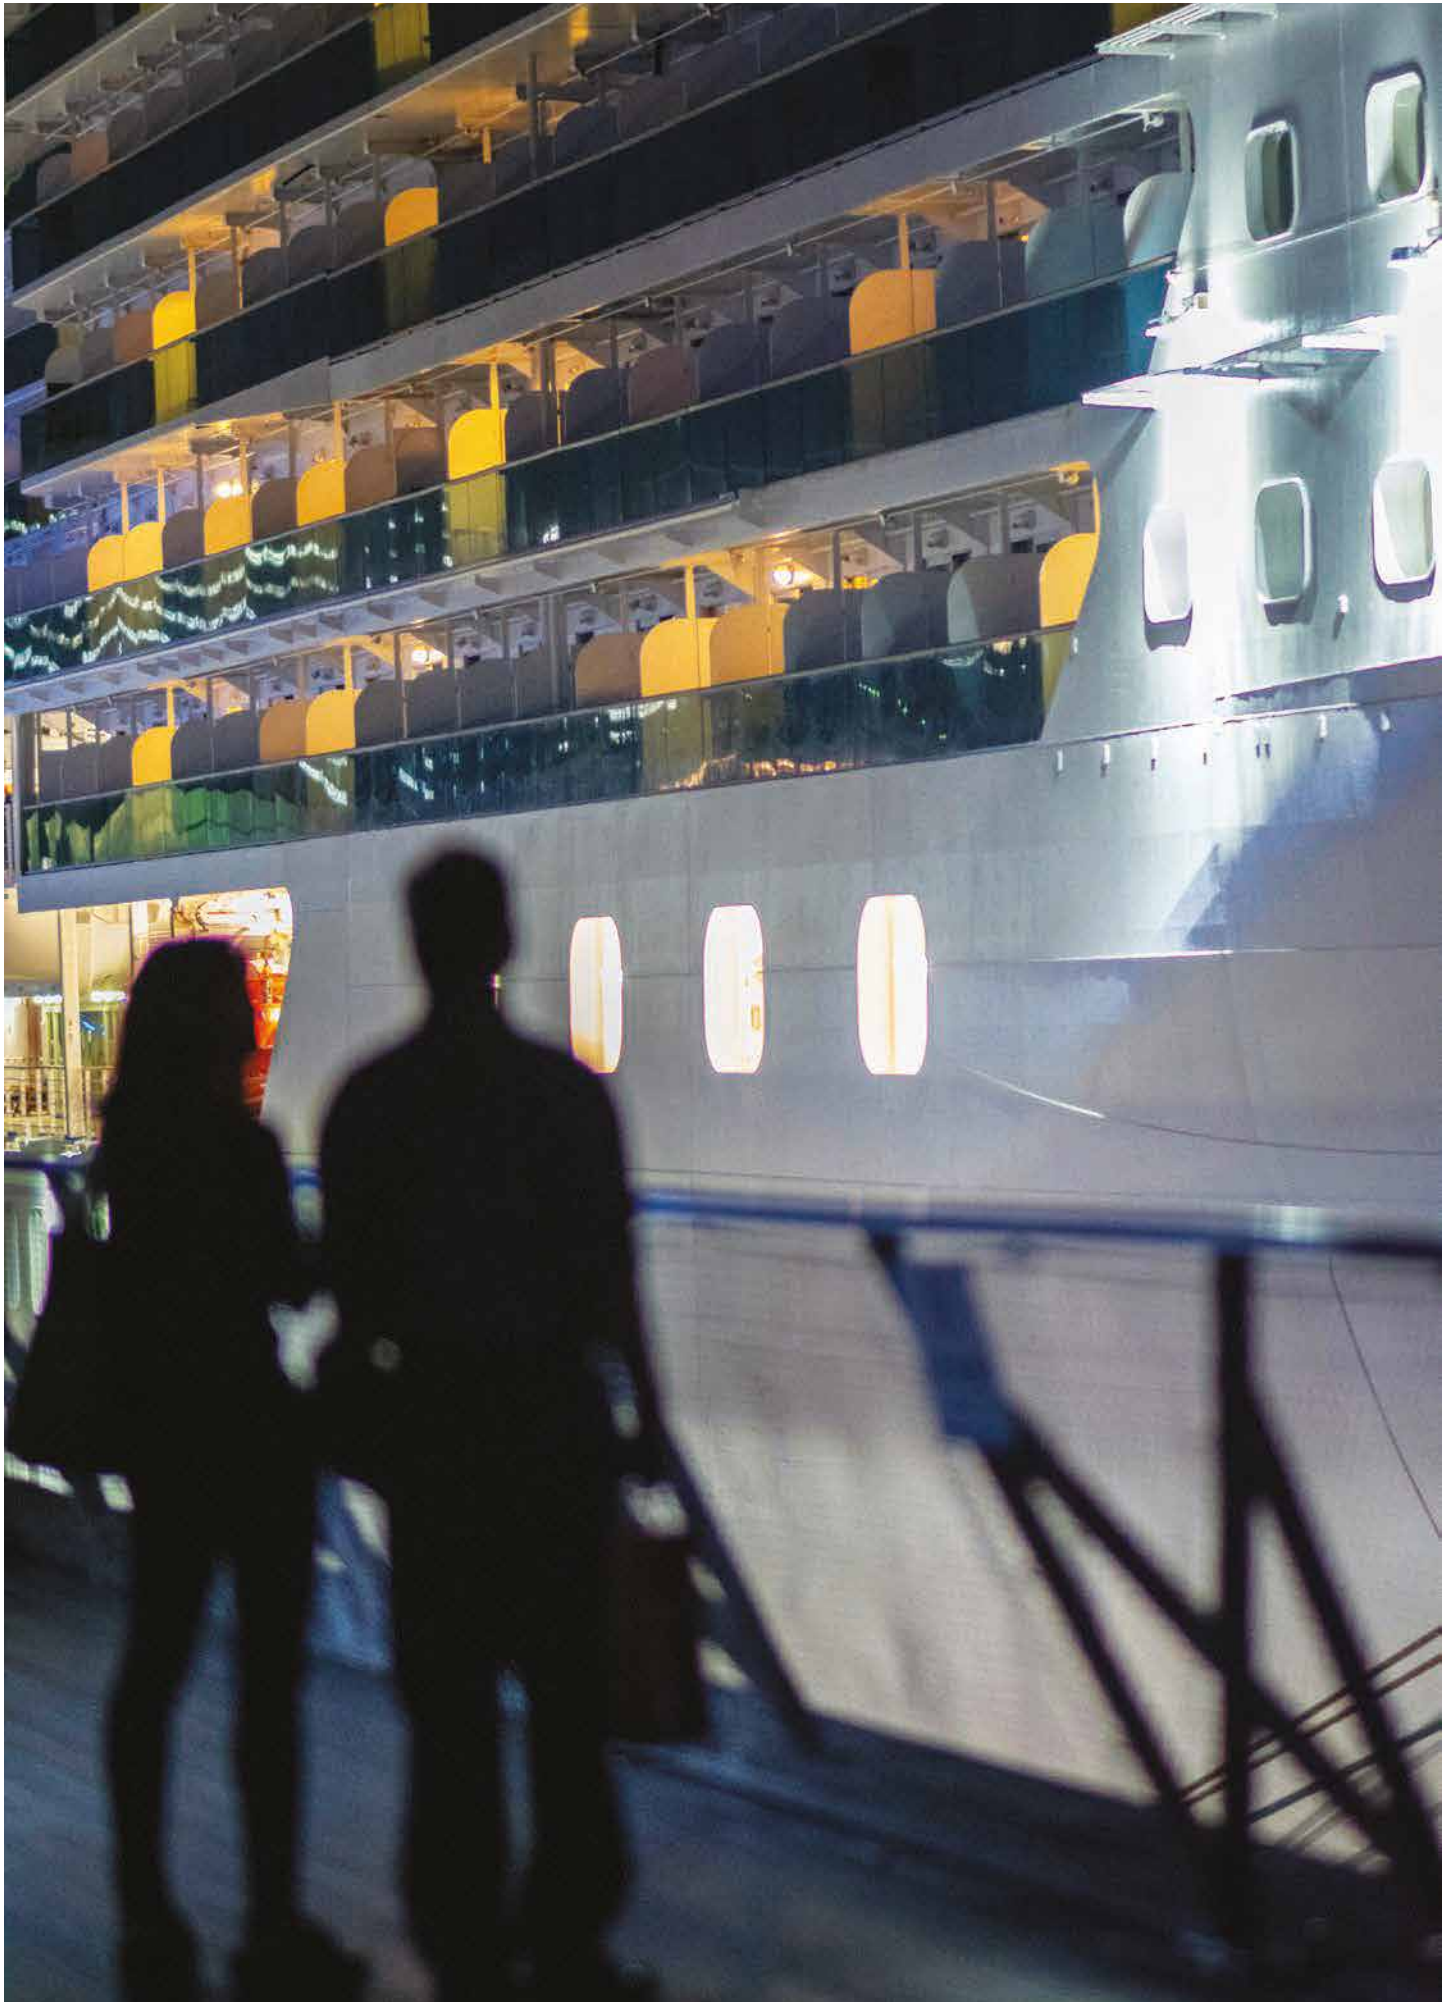



page 6



page 12



page 14



page 18



page 20



page 22



page 24



page 30



page 32



page 34



page 36



page 38



page 40



page 42



page 44



www.naval.fabasluce.it

Refer to our website <https://naval.fabasluce.it/en/commercial-cruise-marine> for updated LED lighting fixtures data sheets.

All the product images in this brochure are for illustration purposes only, actual product may vary.

TVE INDOOR

Multipurpose LED light fixture for Interior ship spaces, compact and powerful.
Many variants already available for different tasks.



Optic diffused beam

180°

Diffuser anti glare opal polycarbonate

Flame rating V-0 (UL 94 test), UV resistant

Color Rendering Index

CRI >85

Photobiological risk group

RG0

Driver

Inside the fixture.

Wiring

Through wiring with junction boxes on the fixture.

Power factor

>0,9

Insulation Class

Class 1

IP Rate

IP 66/67

Housing

Made of marine grade copper free aluminum, inox bolts

Fixing

Stainless steel brackets AISI 316L

Net Weight

2,5 Kg

Lifetime

100.000 hours

International Standards, compliance where applicable


IEC 60092-306; IEC 60533; EN 60598-1; Lloyd's Register type approval

Peculiar features


Many independent lights combinations in the same housing

Optional: Emergency battery back up

1-3 HR

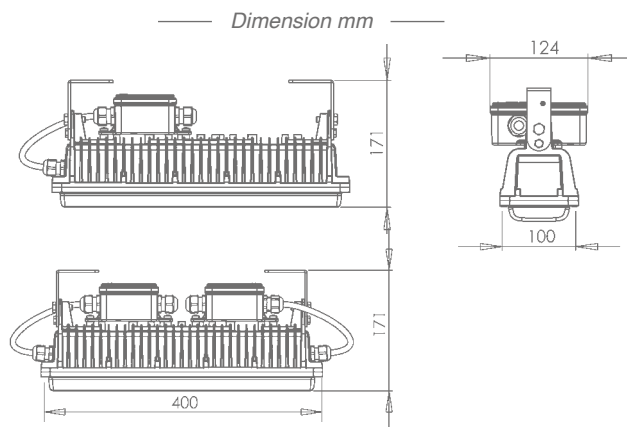

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
100/240V AC 50/60Hz	-40° / + 55°C	White RAL 9010	On/Off	6.500K	From 300 to 3.250
24V DC		Grey RAL 7040	On/Off light color selection rotatory switch on fixture	4000K	
		Blue RAL 5011	Dim. 10-100 with potentiometer on fixture	3000K	
			DALI Dim. 0-100 remote control	Red	
			Blue		
				Secondary light	
				LED light color	Lumen
				4000K	From 40 to 600
				Red	
				Blue	

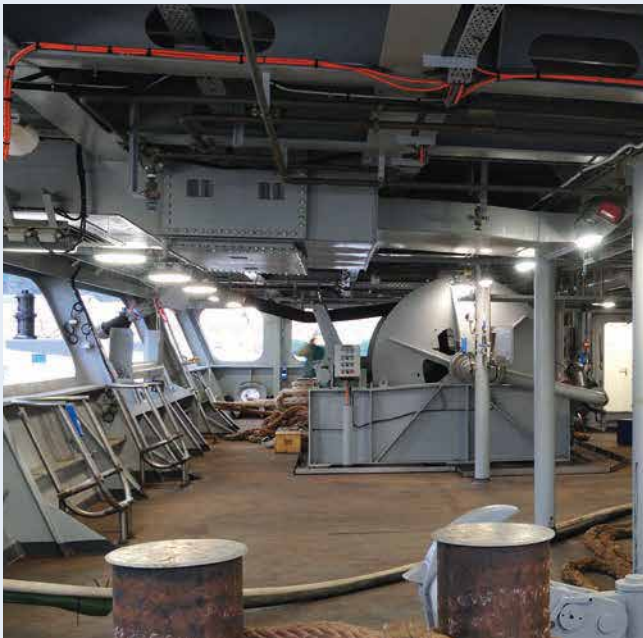

TVE OUTDOOR

Multipurpose LED light fixture for Exterior ship spaces, compact and powerful
Many variants already available for different tasks.



Optic diffused beam
180°

Diffuser anti glare opal polycarbonate
Flame rating V-0 (UL 94 test), UV resistant

Color Rendering Index
CRI >85

Photobiological risk group
RG0

Driver
Inside the fixture.

Wiring
Through wiring with junction boxes on the fixture.

Power factor
>0,9

Insulation Class
Class 1

IP Rate
IP 66/67

Housing
Made of marine grade copper free aluminum, inox bolts

Fixing
Stainless steel brackets AISI 316L


Net Weight
2,5 Kg

Lifetime
100.000 hours


International Standards, compliance where applicable
IEC 60092-306; IEC 60533; EN 60598-1; Lloyd's Register type approval

Peculiar features
TVE for outside deck is equipped with anti-condensation valve for air recirculation

Optional: Emergency battery back up
1-3 HR

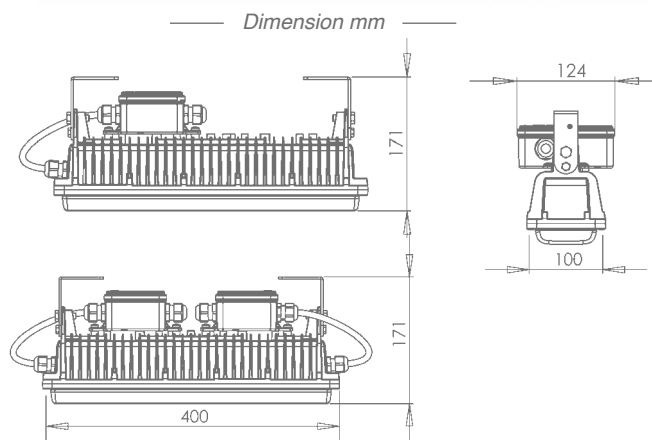

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
100/240V AC 50/60Hz	-40° / + 55°C	White RAL 9010	On/Off	6.500K	From 300 to 3.250
24V DC		Grey RAL 7040	On/Off light color selection rotatory switch on fixture	4000K	
		Blue RAL 5011		3000K	
				Dim. 10-100 with potentiometer on fixture	
			DALI Dim. 0-100 remote control	Blue	
				Secondary light	
				LED light color	Lumen
				4000K	From 40 to 600
				Red	
				Blue	

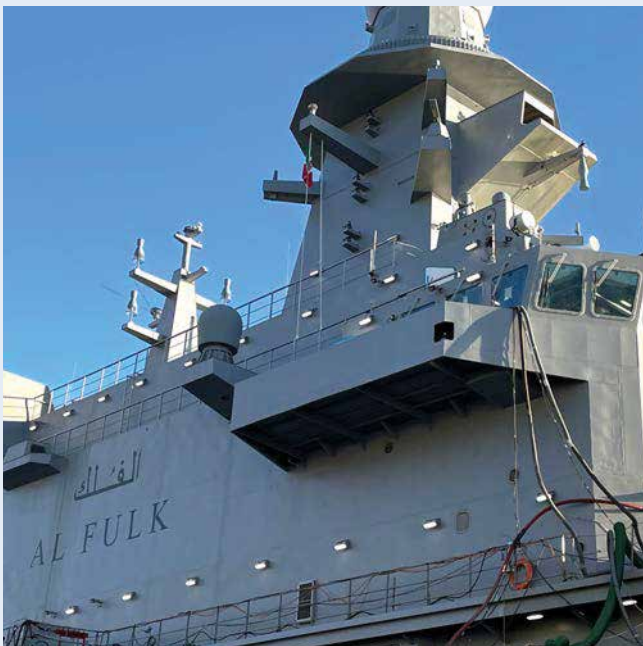

TVE NVG



NVG COMPATIBLE LED light fixture for indoor and open decks
 Compliant to “Stage 3 NVD compatible” of “NATO standard
 MPP-02 for NVG Night Vision Goggles
 NVD Night Vision Device
 NVIS Night Vision Imaging System
 Luminous flux direct from LED (no use of any filter)

Optic diffused beam
 180°

Diffuser anti glare opal polycarbonate
 Opal polycarbonate

Color Rendering Index
 CRI >85

Photobiological risk group
 RG0

Driver
 Inside the fixture.

Wiring
 Through wiring with junction boxes on the fixture.

Power factor
 >0,9

Insulation Class
 Class 1

IP Rate
 IP 66/67

Housing
 Orientable made of marine grade copper free aluminum, inox bolts

Fixing
 Stainless steel brackets AISI 316


Net Weight
 2,5 Kg

Lifetime
 100.000 hours


International Standards, compliance where applicable
 IEC 60092-306; IEC 60533; EN 60598-1 - Lloyd's Register type approval

Peculiar features
 TVE for outside deck is equipped with anti-condensation valve for air recirculation

Optional: Emergency battery back up
 1-3 HR

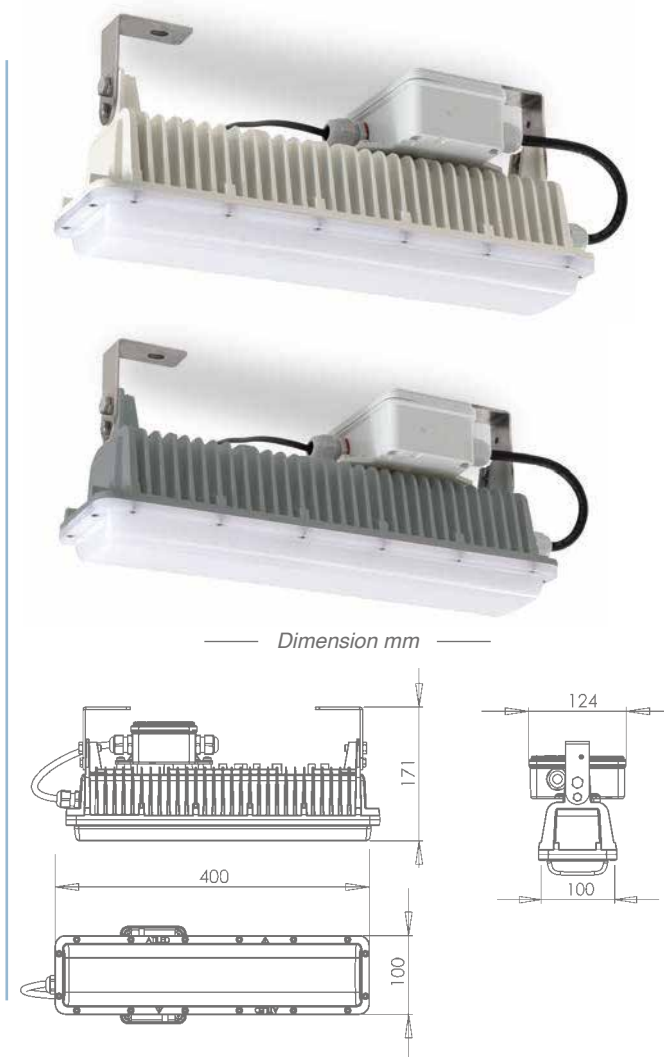

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
100/240V AC 50/60Hz	-40° / + 55°C	White RAL 9010	On/Off	Blue NVG	Min 220 Max 1.084
		Grey RAL 7040	Dim. with potentiometer on fixture	Red NVG	
		Blue RAL 5011	DALI Dim. 0-100 remote controle	White NVG	
				Green NVG	

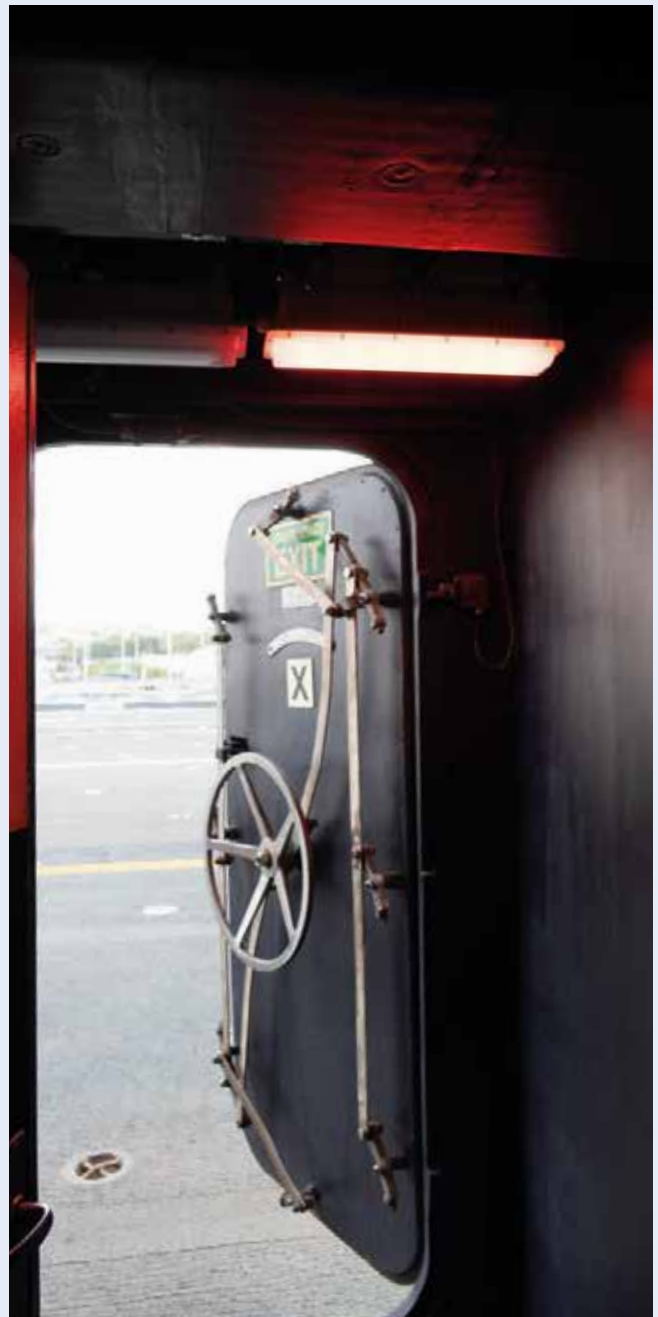

POWERFUL AND COMPACT GENERAL PURPOSE LED LIGHT FIXTURE

Suitable for high ceiling spaces, engine rooms and outside areas.



Optic diffused beam

180°

Diffuser anti glare opal polycarbonate

Opal polycarbonate

Color Rendering Index

CRI >85

Photobiological risk group

RG0

Driver

Inside the fixture

Wiring

Through wiring with junction boxes on the fixture.

Power factor

>0,9

Insulation Class

Class 1

IP Rate

IP 66/67

Housing

Orientable made of marine grade copper free aluminum, inox bolts

Fixing

Stainless steel brackets AISI 316

Net Weight

2,5 Kg

Lifetime


100.000 hours

International Standards, compliance where applicable


IEC 60092-306; IEC 60533; EN 60598-1

Peculiar features

TGL for outside deck is equipped with anti-condensation valve for air recirculation

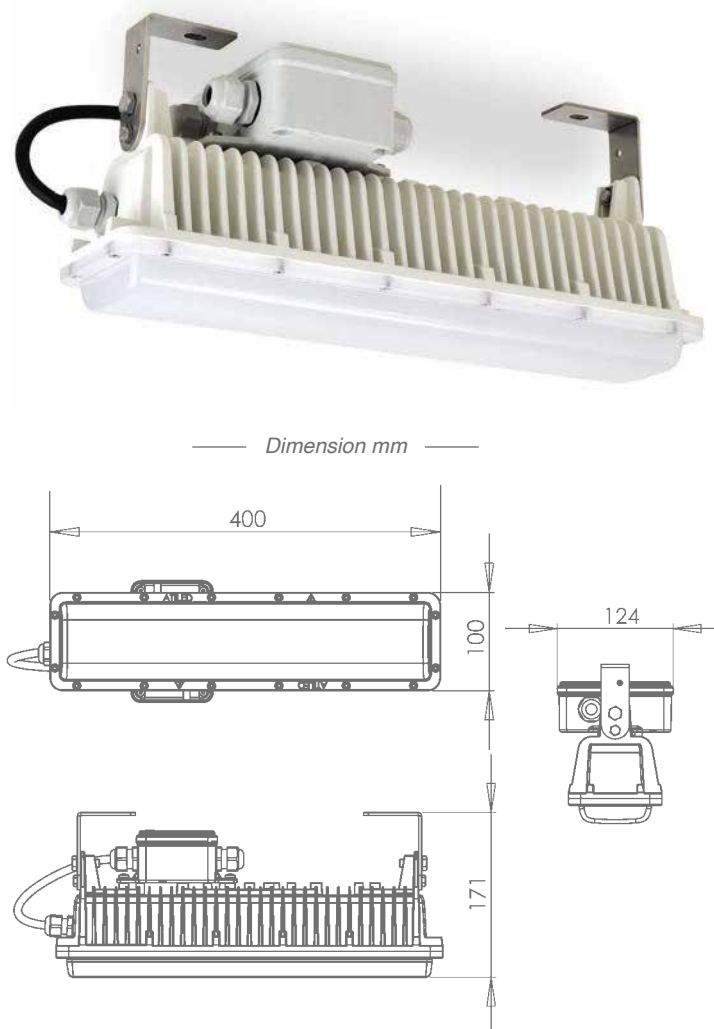

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
100/240V AC 50/60Hz	-40° / + 55°C	White RAL 9010	On/Off	4000K	5.400
		Grey RAL 7040		6500K	

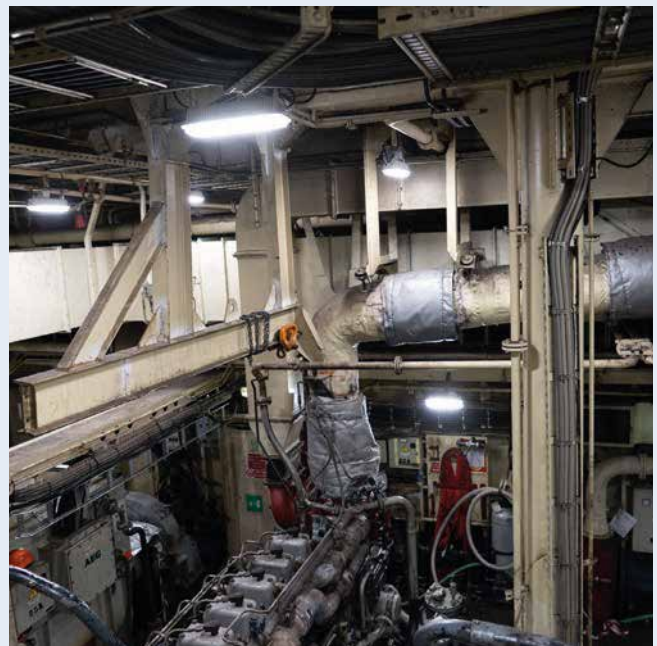

STARFIX 600

COMPACT POWERFUL LED LIGHT FIXTURE
INDOOR OUTDOOR AND OPEN DECKS

Housing material

Pre-hot dip galvanized steel or stainless steel AISI 316L

Optic diffused beam

180°

Diffuser anti glare opal polycarbonate

Flame rating V-0 (UL 94 test), UV resistant

Color Rendering Index

CRI 90 (min.) 92 (typ.)

Photobiological risk group

RG0

Driver

Inside the fixture.

Wiring

Through wiring.

Power factor

>0,95

Insulation Class

Class 1

IP Rate

IP 66/67

Mounting

M8 treaded pin whit nut on preinstalled bushing all stainless steel AISI 316L

Net Weight

2,5 Kg

Lifetime


100.000 hours

International Standards, compliance where applicable

EN 60598-1; EN 60598-2-1; Lloyd's Register type approval;
EN 62471 + TR62778; EN IEC 63000 2018

Optional: Emergency battery back up

1-3 HR

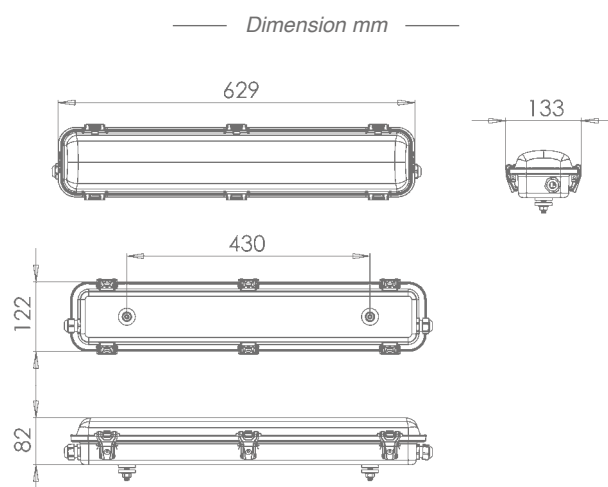

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light LED light color	Lumen
120/277 V AC 50/60Hz	-40° / + 55°C	White RAL 9016	On/Off	4000K	Min 3.065 Max 5.622



STARFIX 1200

POWERFUL LED LIGHT FIXTURE
INDOOR OUTDOOR AND OPEN DECKS

Housing material

Pre-hot dip galvanized steel or stainless steel AISI 316L

Optic diffused beam

180°

Diffuser anti glare opal polycarbonate

Flame rating V-0 (UL 94 test), UV resistant

Color Rendering Index

CRI 90 (min.) 92 (typ.)

Photobiological risk group

RG0

Driver

Inside the fixture.

Wiring

Through wiring.

Power factor

>0,95

Insulation Class

Class 1

IP Rate

IP 66/67

Mounting

M8 threaded pin whit nut on preinstalled bushing all stainless steel AISI 316L

Net Weight

2,5 Kg

Lifetime


100.000 hours

International Standards, compliance where applicable

EN 60598-1; EN 60598-2-1; Lloyd's Register type approval;
EN 62471 + TR62778; EN IEC 63000 2018

Optional: Emergency battery back up

1-3 HR

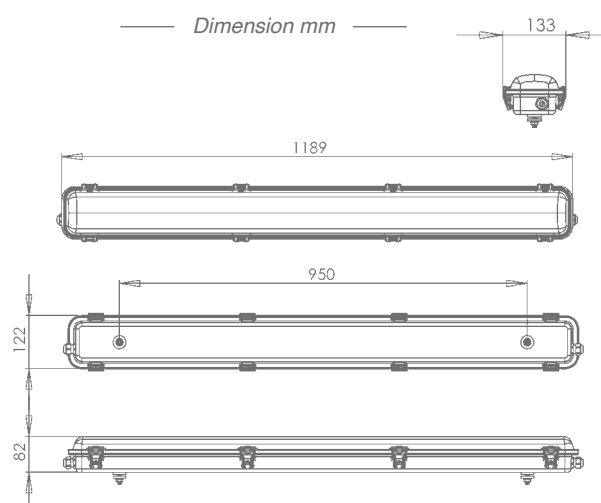

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
120/277 V AC 50/60Hz	-40° / + 55°C	White RAL 9016	On/Off	4000K	Min 6.130 Max 12.730



GALCOR

LED LIGHT FIXTURE INOX USPHS COMPLIANT

Suitable for Galley, Cold Room, CBRN chemical, biological, radiological and nuclear decontamination stations



Optic diffused beam

180°

Diffuser anti glare opal polycarbonate

Flame rating V-0 (UL 94 test), UV resistant

Photobiological risk group

RG0

Color Rendering Index

CRI 85

Driver

Inside on the fixture

Wiring

Through wiring inside fixture

Power factor

>0,9

Insulation Class

Class 1

IP rate

IP 66/67

Housing

Stainless steel AISI 316L with anti-condensation valve for air recirculation

Fixing

Counter ceiling with holes for 6 screws, perimeter sealed with silicone gasket

Net Weight

2 Kg

Lifetime


100.000 hours

International Standards

USPHS compliant

Optional: Emergency battery back up

1-3 HR

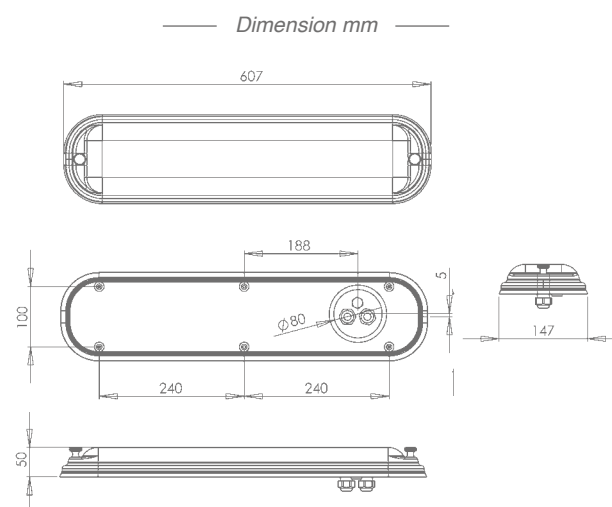

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
100/240 V AC 50/60Hz	-43° / + 45°	White Opal PC	On/Off	4000K	Min 3.992 Max 6.375
				3000K	
24V DC				Red	



TOR 50

HIGH EFFICIENCY LED FLOOD LIGHT

Very compact and robust LED flood light
One lens for each LED assure intense and precise light beam
On request different housing color and light temperature color



Optic

21° 45° 65°

Diffuser

Clear polycarbonate

Color Rendering Index

CRI >70

Driver

Inside on the fixture

Wiring

Through wiring junction box in the fixture back side

Power factor

>0,9

Insulation Class

Class 1

IP rate

IP 66/67

Housing

Orientable made of marine grade copper free aluminum, inox bolts, with anti-condensation valve for air recirculation

Fixing

Stainless steel brackets AISI 316

Net Weight

2,6 Kg

Lifetime


100.000 hours

International Standards, compliance where applicable


IEC 60092-306; IEC 60533; EN 60598-1



Dimension mm

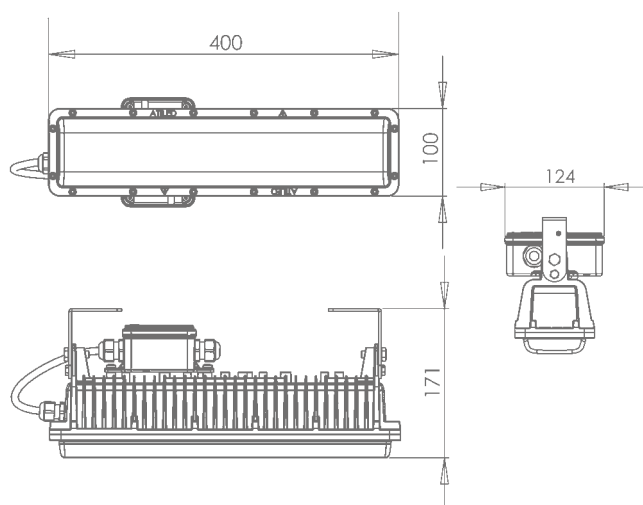

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
100/240V AC 50/60Hz	-40° / + 55°C	White RAL 9016	On/Off	4000K	Min 52 Max 6.500
		Grey RAL 7040		Red	

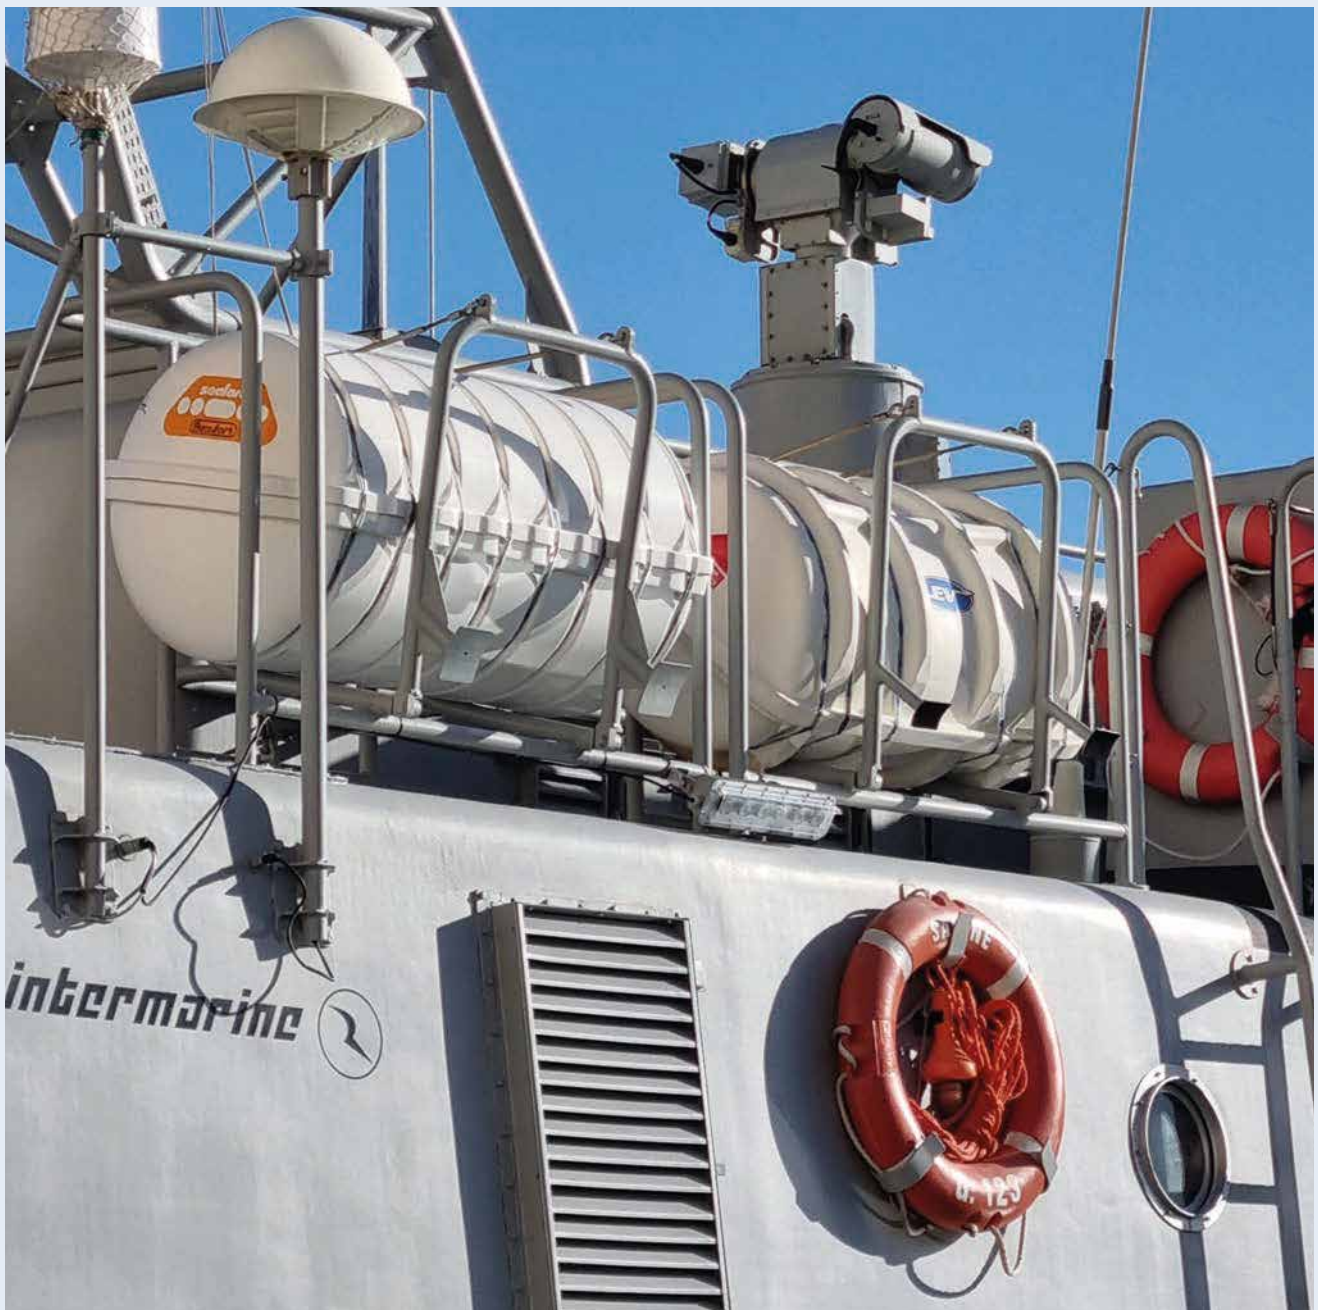

TON 100-160

HIGH EFFICIENCY LED FLOODLIGHT

Powerful, precise and robust LED flood light

Compact and low weight housing

One lens for each LED assure intense and precise light beam

On request different housing color and light temperature color



Optic

26° 54° 90°

Diffuser

Clear tempered glass

Color Rendering Index

CRI >70

Driver

With electronic power supply on the fixture

Wiring

Power line connection with junction box or IP68 connector

Power factor

>0,9

Insulation Class

Class 1

IP rate

66/67

Working ambient temperatures

Equipped with active control of external ambient temperature

Housing

Orientable made of marine grade copper free aluminum grey, inox bolts, with anti-condensation valve for air recirculation

Fixing

Orientable stainless steel brackets AISI 316

Net Weight


8,5 Kg

Lifetime

100.000 hours

International Standards, compliance where applicable

IEC 60092-306; IEC 60533; EN 60598-1; Lloyd's Register type approval

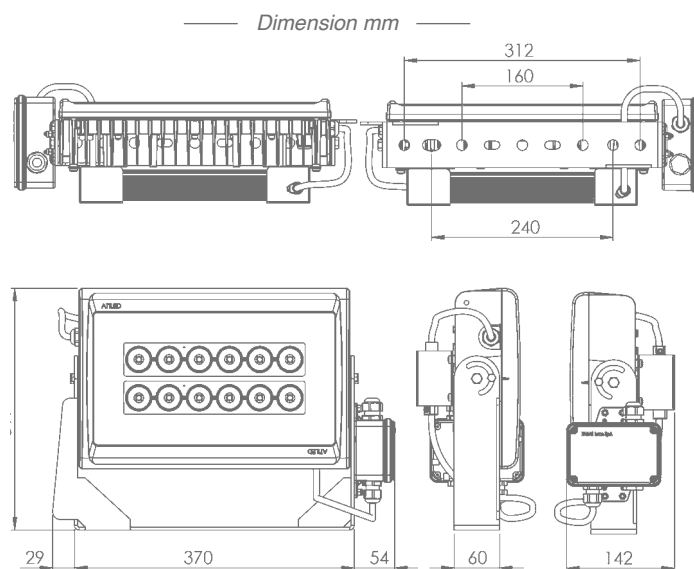

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
100/240V AC 50/60Hz	-40° / + 55°C	White RAL 9016 Grey RAL 7040	On/Off	5700K	Min 6.250 Max 18.216
				4000K	
				3000K	
				Red	
				Green	
				Blue	



PEX

Compact EX explosion proof LED light fixture
for Gases and Dusts hazardous areas - indoor
and open decks



Optic diffused beam

120°

Diffuser

High thickness borosilicate glass

Color Rendering Index

CRI >85

Photobiological risk group

RG0

Driver

Inside the fixture.

Wiring

Two cable glands for Through wiring connections

Power factor

>0,9

Insulation Class

Class 1

IP Rate

IP 66

Housing

Made of marine grade copper free aluminum, inox bolts

Fixing

Aluminum brackets

Net Weight

8 Kg


Lifetime

100.000 hours

International Standards, compliance where applicable

IEC 60092-306; IEC 60533; EN 60598-1

CE INERIS 15 ATEX 0024X

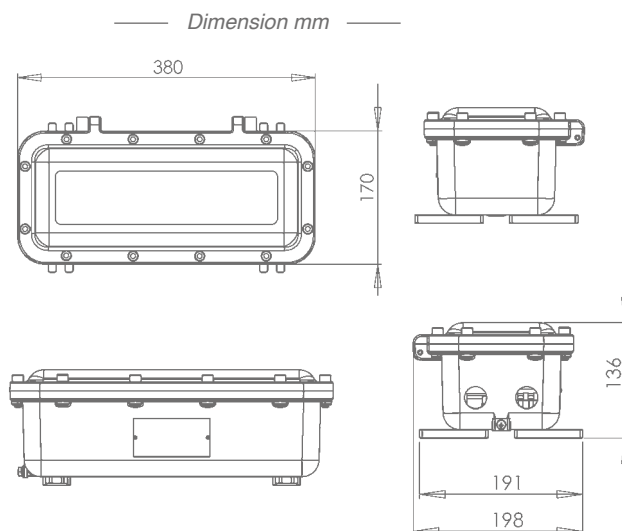

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light LED light color	Lumen
100/240V AC 50/60Hz	-40° / + 55°C	White RAL 9010	On/Off	4000K	Min 52 - Max 3000
24 VDC		Grey RAL 7040	DALI Dim. 0-100 remote controle	Red	
			Dim. 10-100 with potenziom. on external box	Blu	



PEX DOUBLE LIGHTS

Two independent LED lights in the same compact EX explosion proof LED light fixture for Gases and Dusts hazardous areas - indoor and open decks



Optic diffused beam

120°

Diffuser anti glare opal polycarbonate

High thickness borosilicate glass

Color Rendering Index

CRI >85

Photobiological risk group

RG0

Driver

Inside the fixture.

Wiring

Four cable glands for Through wiring connections

Power factor

>0,9

Insulation Class

Class 1

IP Rate

IP 66

Housing

Made of marine grade copper free aluminum, inox bolts

Fixing

Aluminum brackets

Net Weight

8 Kg


Lifetime

100.000 hours

International Standards, compliance where applicable

IEC 60092-306; IEC 60533; EN 60598-1

CE INERIS 15 ATEX 0024X

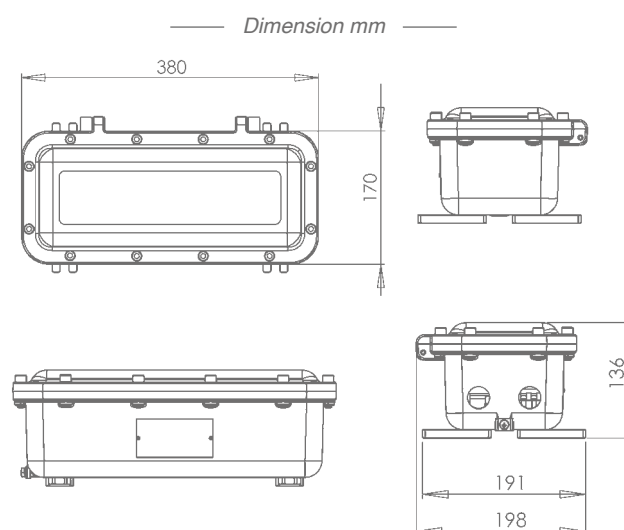

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light			
				LED light color	Lumen		
100/240V AC 50/60Hz	-40° / + 55°C	White RAL 9010	On/Off	4000K	Min 52 - Max 3000		
		Grey RAL 7040					
				Secondary Light			
				LED light color	Lumen		
				4000K	Min 52 - Max 3000		
				Red			



PEX NVG

EX explosion proof NVG COMPATIBLE LED light fixture for Gases and Dusts hazardous areas - indoor and open decks
Compliant to "Stage 3 NVD compatible" of "NATO standard MPP-02 for NVG Night Vision Goggles NVD Night Vision Device NVIS Night Vision Imaging System Luminous flux direct from LED (no use of any filter)



Optic diffused beam
120°

Diffuser
High thickness borosilicate glass

Color Rendering Index
CRI >85

Photobiological risk group
RG0

Driver
Inside the fixture.

Wiring
Two cable glands for Through wiring connections

Power factor
>0,9

Insulation Class
Class 1

IP Rate
IP 66


Housing
Made of marine grade copper free aluminum, inox bolts

Fixing
Aluminum brackets

Net Weight
8 Kg

Lifetime
100.000 hours

International Standards, compliance where applicable
IEC 60092-306; IEC 60533; EN 60598-1
CE INERIS 15 ATEX 0024X

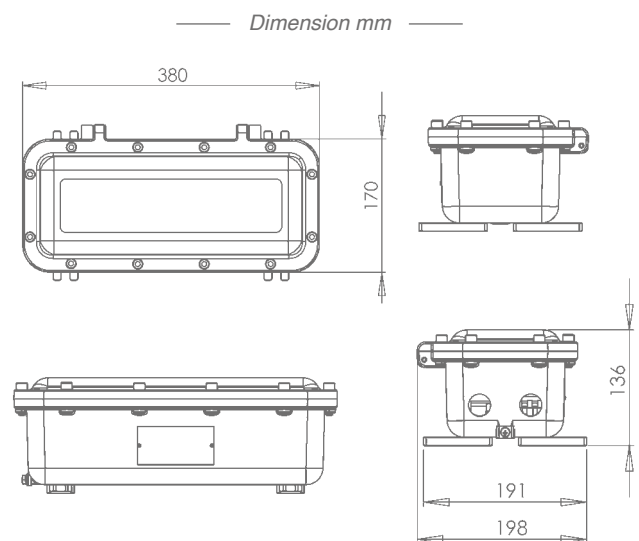

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light LED light color	Lumen
100/240V AC 50/60Hz	-40° / + 55°C	White RAL 9010 Gray RAL 7040	DALI Dim. 0-100 remote controle On/Off	Red NVG White NVG Green NVG Blue NVG	Min 52 - Max 1454



GEX

Powerful EX explosion proof LED light fixture
for Gases and Dusts hazardous areas
indoor and open decks



Optic diffused beam

180°

Diffuser

High thickness borosilicate glass

Color Rendering Index

CRI >85

Photobiological risk group

RG0

Driver

Inside the fixture.

Wiring

Two cable glands for Through wiring connections

Power factor

>0,9

Insulation Class

Class 1

IP Rate

IP 66

Housing

Made of marine grade copper free aluminum, inox bolts

Fixing

Stainless steel brackets AISI 316L

Net Weight

8 Kg

Lifetime


100.000 hours

International Standards, compliance where applicable

IEC 60092-306; IEC 60533; EN 60598-1

EX certificate

CE INERIS 12 ATEX 0023X

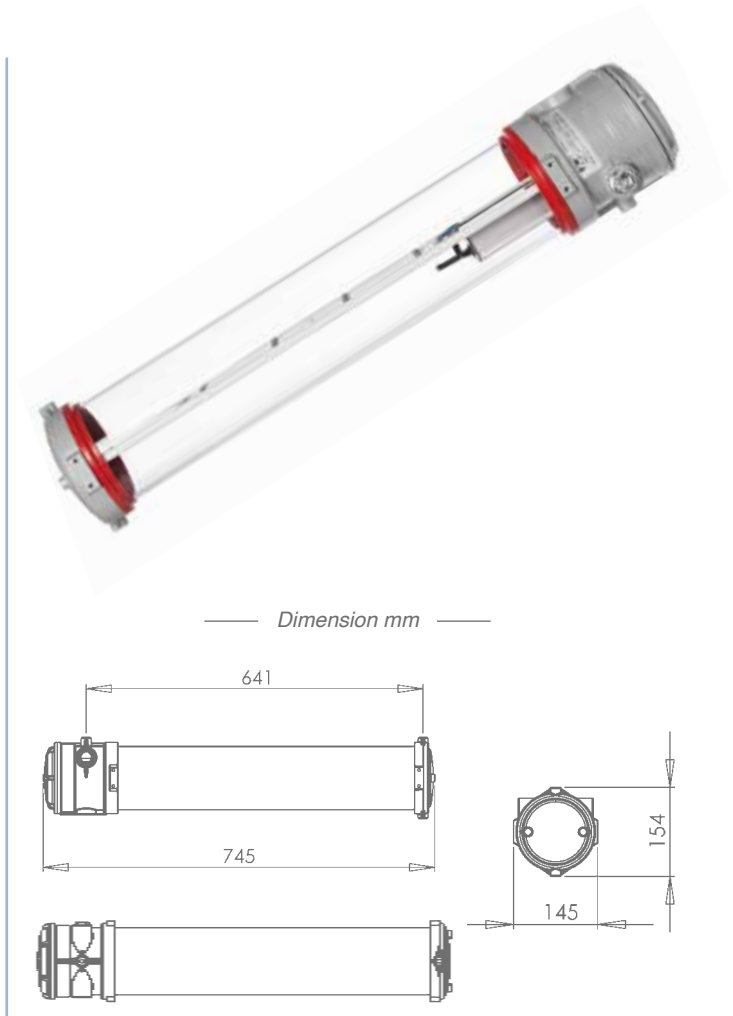

Operation Voltage	Operating ambient temp.	Housing Color	Control System	LED light color	Primary Light Lumen
100/240V AC 50/60Hz	-25° / + 55°C	White RAL 9010	On/Off	4000K	5.000



PSAR

RECESSED ROUND LED LIGHT FIXTURE

Suitable for offices, wardroom, messroom, bathrooms

Light colors available in white warm or natural, Red, Blue, Green



Optic diffused beam

180°

Diffuser

Opal polycarbonate

Color Rendering Index

CRI >80

Photobiological risk group

RG0

Power factor

>0,5

Electric power input

Power supply to be installed outside fixture

Insulation Class

Class II

IP Rate

IP 44

Housing

Aluminum.

Fixing

With 3 screws and / or springs

Net Weight

0,7 Kg

Lifetime


100.000 hours

International Standard


EN 60598-1

Optional: Emergency battery back up

1-3 HR

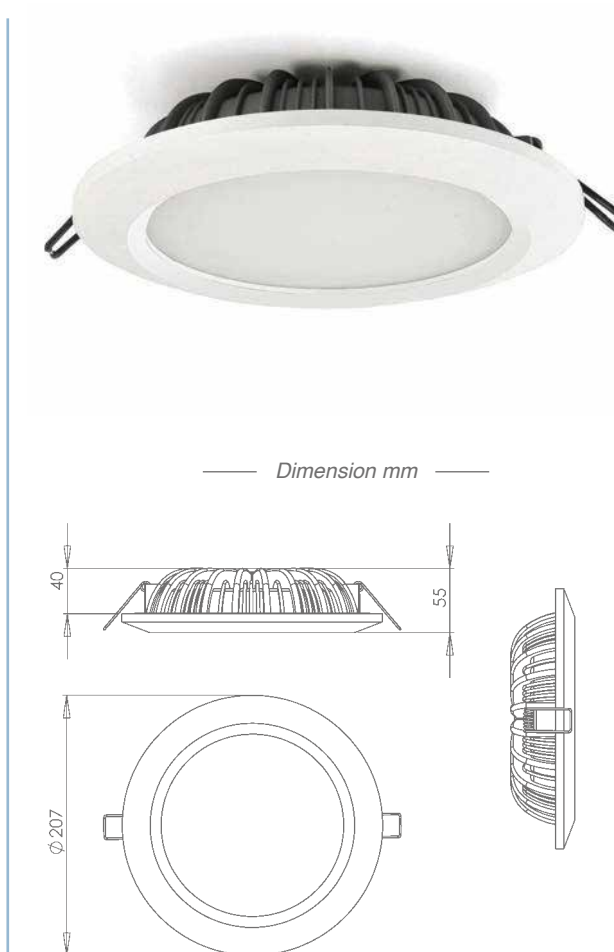

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light LED light color	Lumen
100/240V AC 50/60Hz	-40° / + 55°C	White	On/Off	5000K	Min 52 Max 2.780
		Blue RAL 5011	DALI e Dim. 0-100 remote controle	4000K	
24V DC				3000K	
				Red	
				Blue	
				Green	

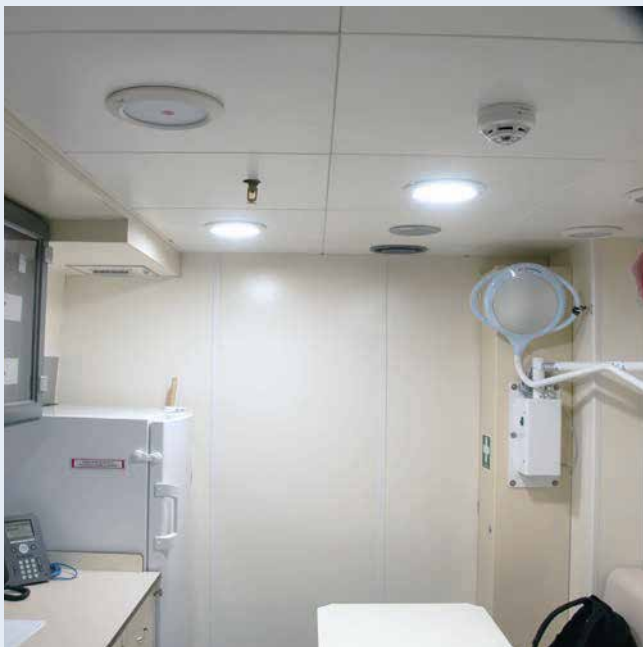

EBLAN

EMERGENCY LED BATTLE LANTERN FULLY MICROPROCESSOR DRIVEN PORTABLE AND FLOATING IP67 WITH RECHARGEABLE BATTERY

Two LEDS wide or narrow beam, high or low intensity white light that in case of blackout last for 10 hours



Color Rendering Index CRI

85

Lifetime Light at reduced luminous flux

4,5 Hours

Lifetime Light at luminous flux 250 lumen

10 Hours

Battery sealed pack with active temperature monitoring and control

Nickel Metal Hydride

Battery charging time from low to max level hours

8

Battery stand by duration without power connection hours

4 / 8 weeks

Low safe recharging power voltage V

< 20

Insulation Class

Class III

IP Rate

IP 67

Working ambient temperatures

-20 / +55 °C

Net Weight

1 Kg

Lantern wall mounting bracket with power unit box

Driver

100 / 240 V AC 50 / 60 Hz

Insulation Class

Class 1

Working ambient temperatures

-20 / +55 °C

IP rate


67

Net Weight

1 Kg



Dimension mm

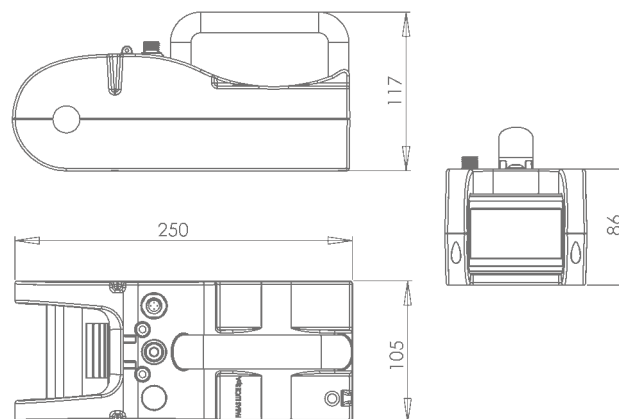

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
100/240 V AC 50/60Hz	-20° / + 55°C	Red	On/Off	5700K	Max 396
				Red	
24V DC				Green	



GLO

LED globe white or colored light indoor and open decks
Models: normal or EX explosion proof for Gases
and Dusts hazardous areas



Optic diffused beam

360°

Diffuser

High thickness borosilicate glass

Color Rendering Index

CRI >85

Photobiological risk group

RG0

Driver

Inside the fixture

Wiring

Two cable glands for Through wiring connections

Power factor

>0,9

Insulation Class

Class 1

IP rate

IP 66

Fixing

Wall or ceiling bracket inox AISI 316 L

Housing

Die-cast marine grade copper free aluminum

Net Weight

3 Kg

Lifetime

100.000 hours

International Standards


IEC 60092-306; IEC 60533; EN 60598-1

EX certificate where applicable

CE INERIS 01 ATEX 0054X



Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
100/240V AC 50/60Hz	-25° / + 55°C	Grey RAL 7040	On/Off	4000K	Min 52 Max 820
				Red	
				Green	
				Blue	
				Orange	

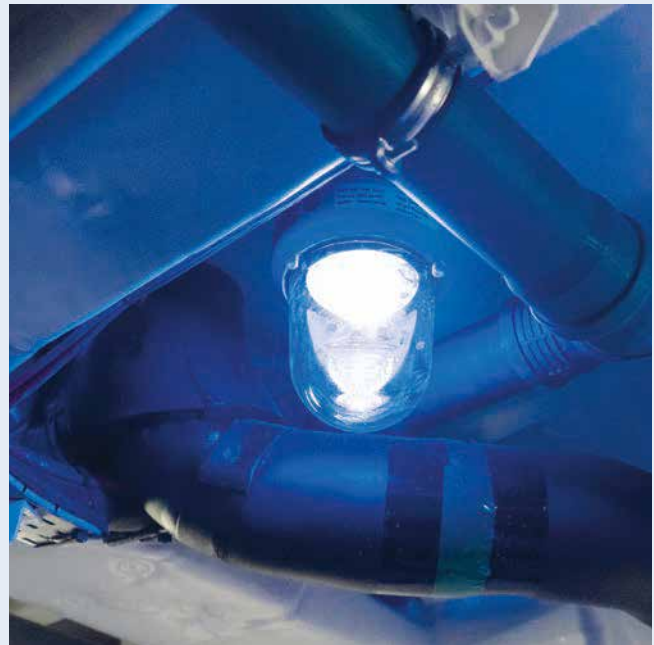

SKOS

HOSPITAL AREAS, SURGERY ROOMS

Optic diffused beam

Prismatic diffuser 180° - UGR <19

Diffuser anti glare opal polycarbonate

Flame rating V-0 (UL 94 test), UV resistant

Color Rendering Index

CRI 90

Photobiological risk group

RG0

Driver

Inside the fixture.

Power factor

>0,9

Insulation Class

Class 1

IP Rate

IP 65 - Front and rear

Housing

Metal frame - White RAL 9003

Net Weight


7 Kg

Lifetime


100.000 hours

International Standards, compliance where applicable

IEC 60092-306; IEC 60533; EN 60598-1

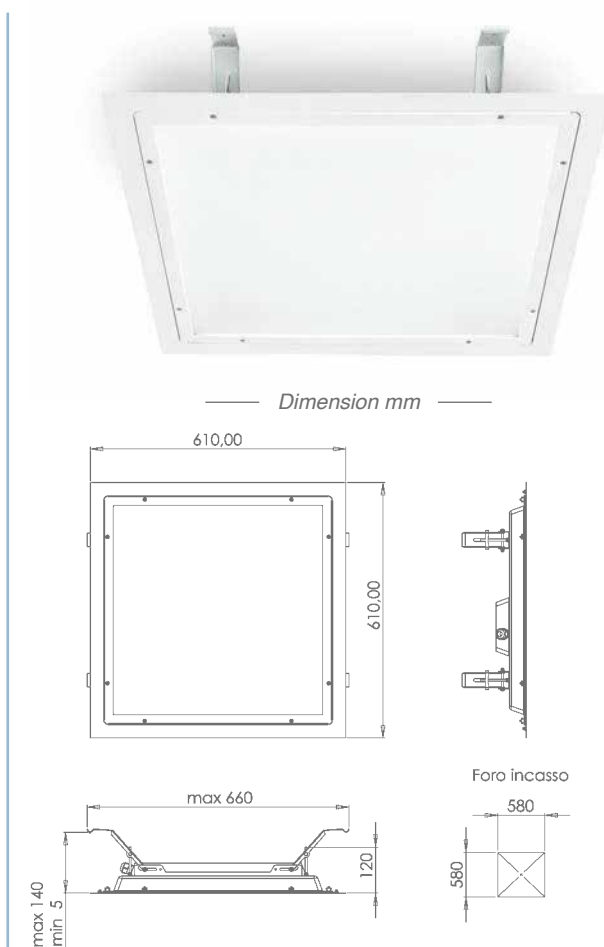

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light LED light color	Lumen
220/240 V AC 50/60Hz	-20° / + 55°C	White RAL 9003	On/Off DALI	4000K	Min 4.222 Max 5.861

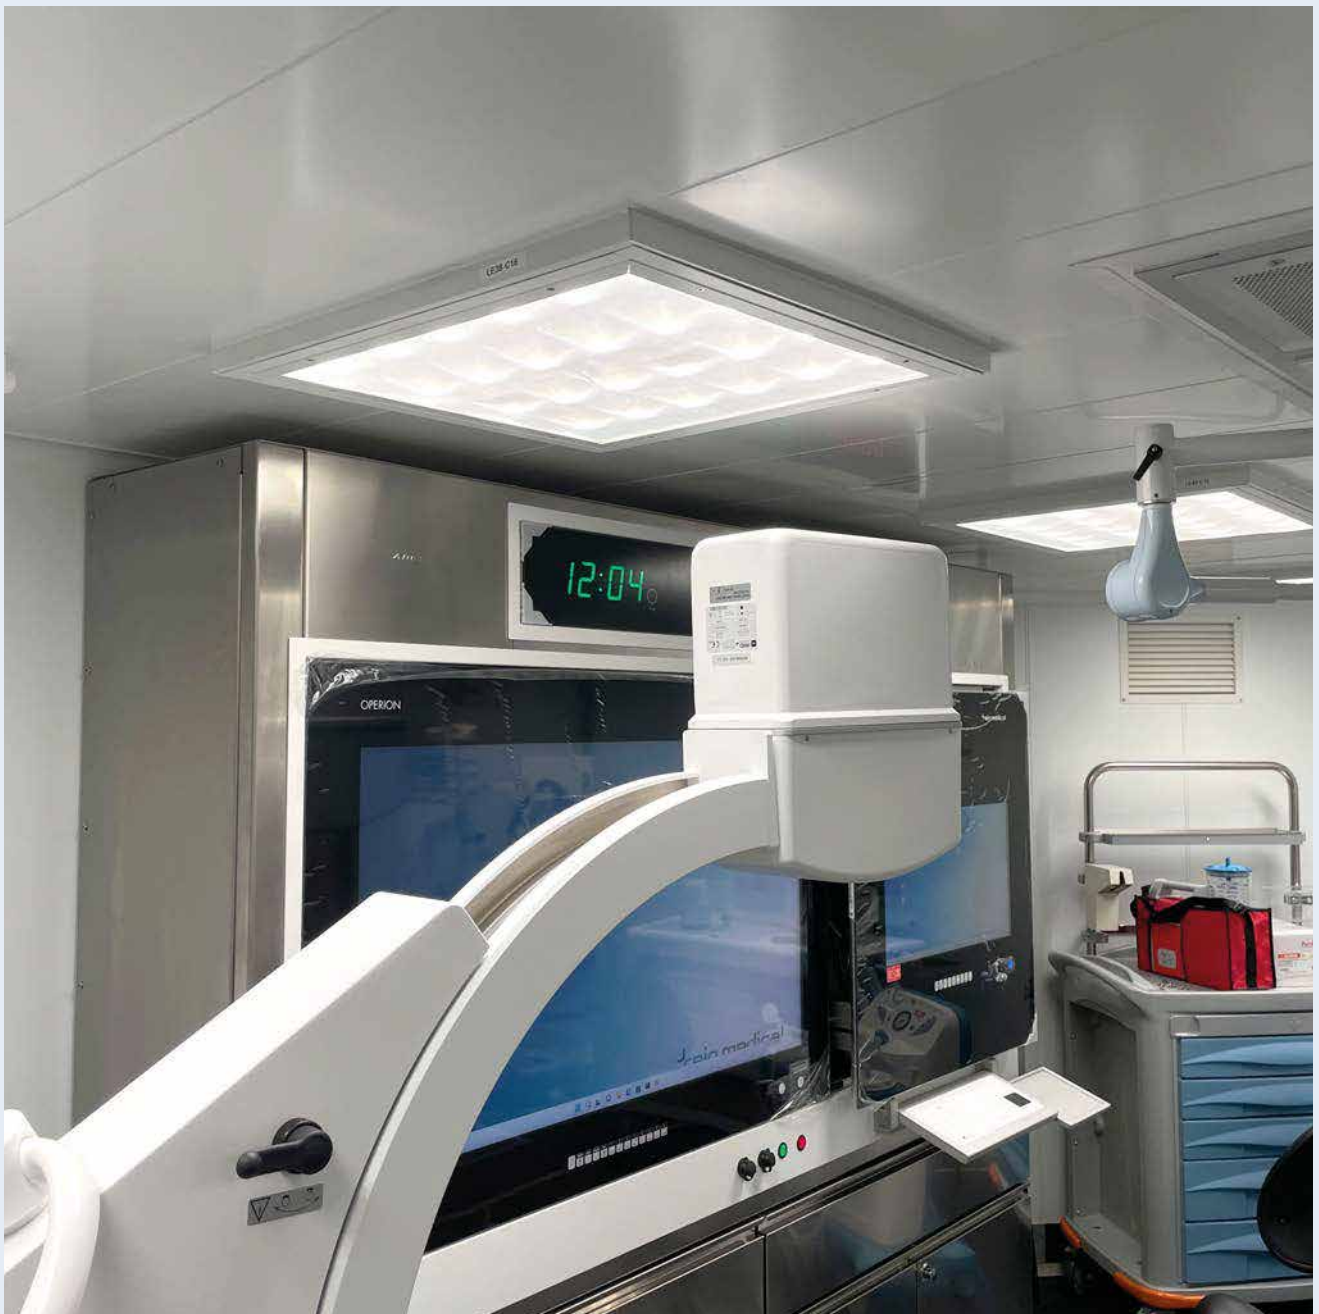



Optic diffused beam
120°

Diffuser
Opal polycarbonate

Color Rendering Index
CRI >85

Photobiological risk group
RG0

Electric power input
Not included external electronic power supply

Wiring
3 m cable line included

Power factor
>0,9

Insulation Class
Class III

IP rate
IP 67/67

Housing
Anodized aluminum

Fixing
Stainless steel brackets AISI 316L


Weight, electric cable included
2,5 Kg

Lifetime
100.000 hours


International Standards
IEC 60092-306; IEC 60533; EN 60598-1



Dimension mm

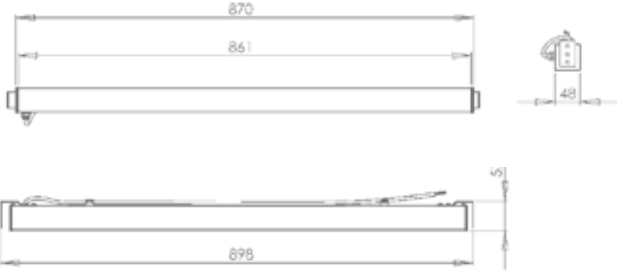

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
24V DC	-25° / + 55°C	Grey RAL 7040	On/Off	4000K	2970 lm

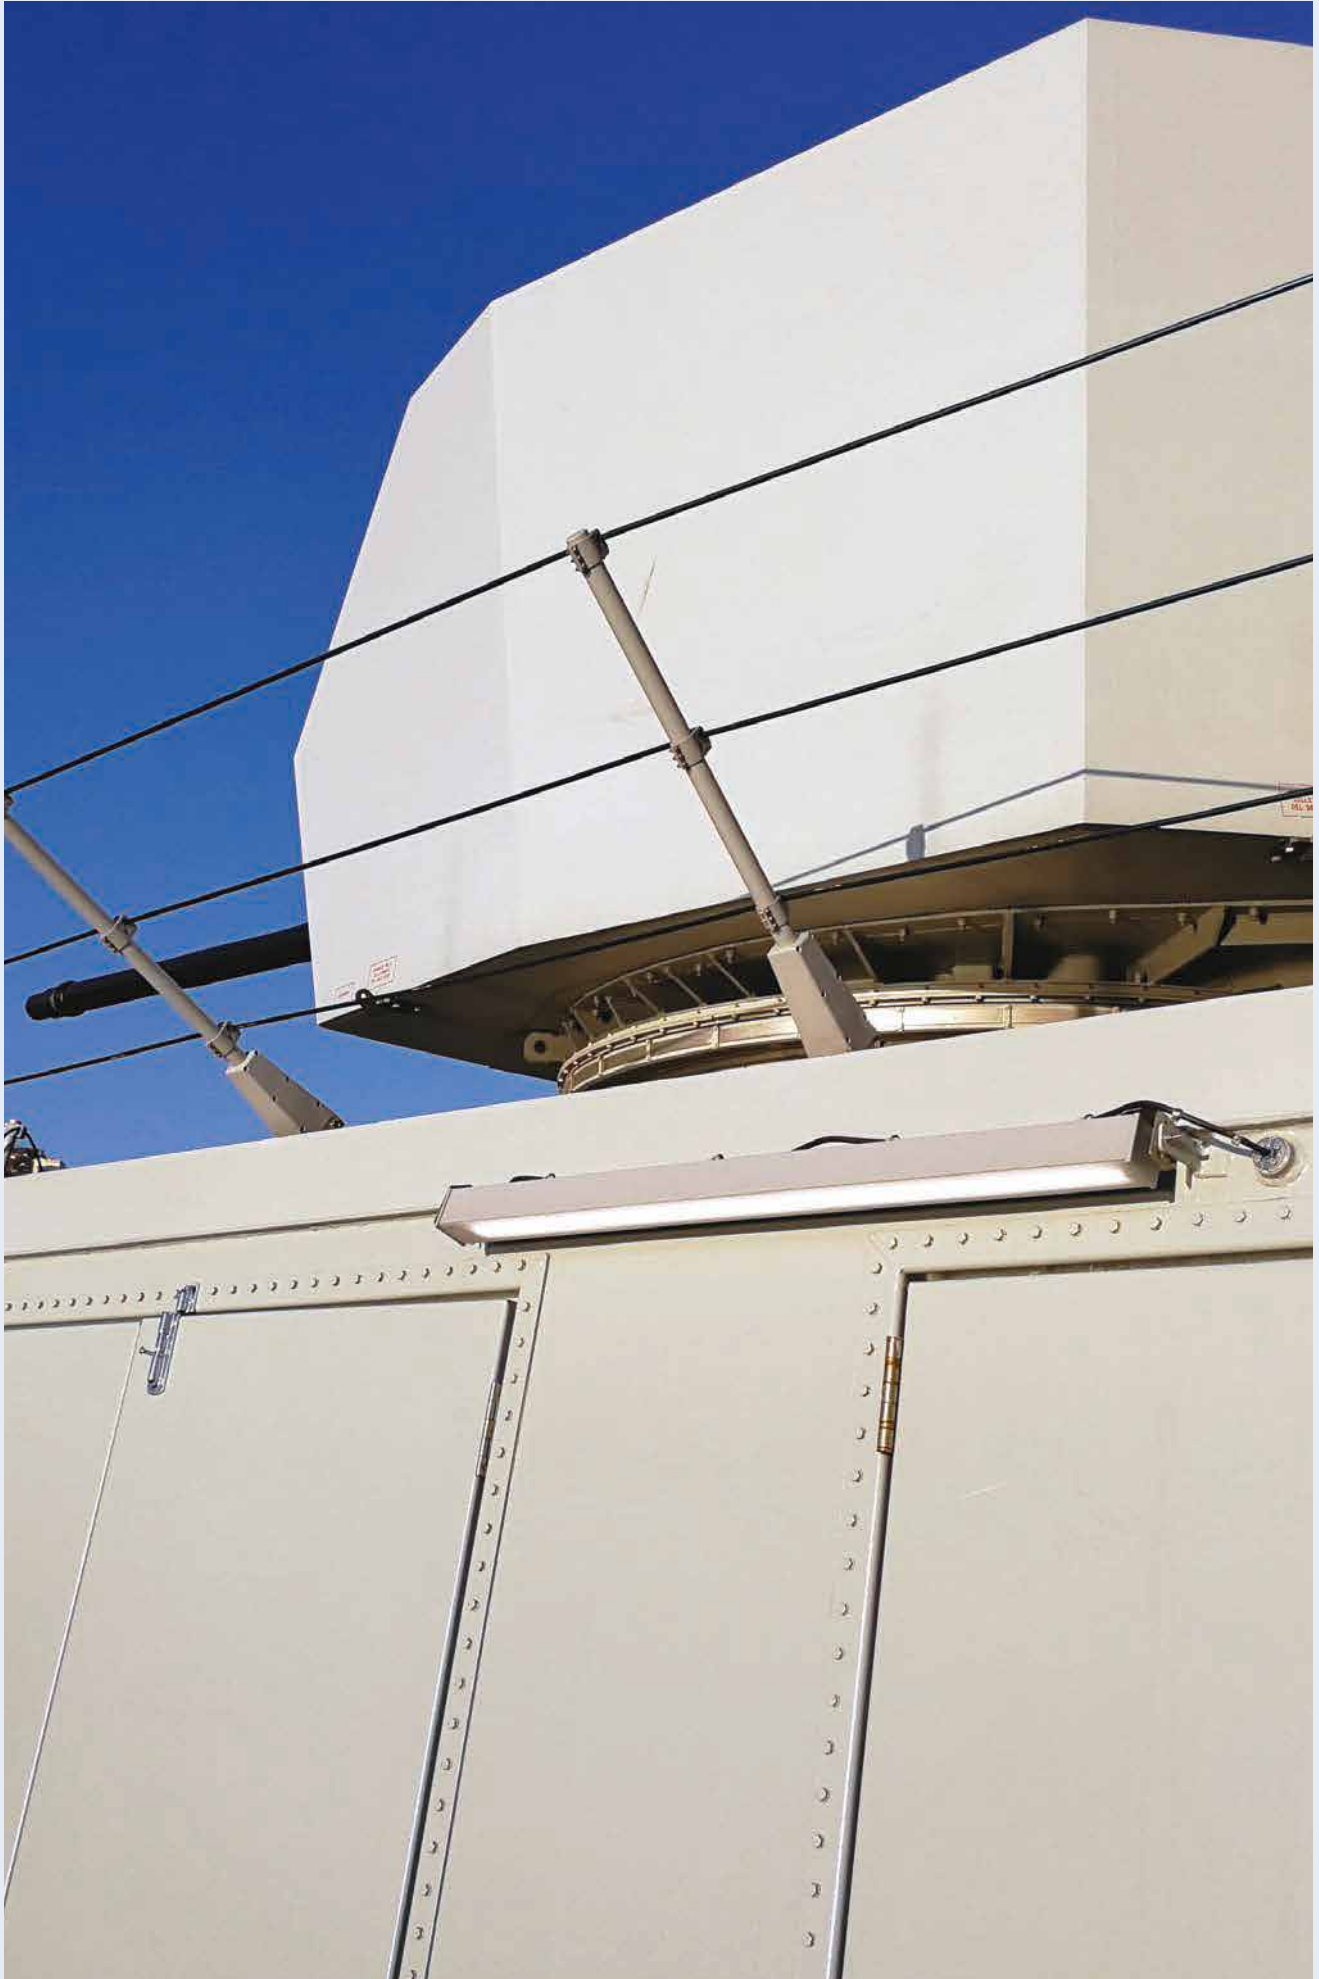

CTL

BERTH LIGHTS

Recessed led fixture with integrated on/off touch dimmable control

Optic diffused beam

180°

Diffuser

Opal polycarbonate

Color Rendering Index

CRI >85

Photobiological risk group

RG0

Electric power input

Not included external electronic power supply

Wiring

0,7m cable line included

Power factor

>0,9

Insulation Class

Class III

IP rate

IP 20

Housing

Anodized aluminum, grey natural color

Fixing

two inox springs

Weight, electric cable included

0,4 Kg

Lifetime


> 50.000

International Standards

EN 60598-1



Dimension mm

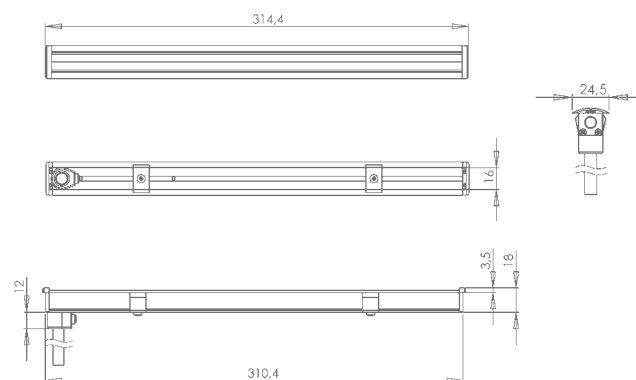

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
24V DC	-25° / + 45°C	Anodized aluminium	Touch Dimmer	3000K	Max 630 lm
			On/Off		



CLS

WRITING / READING CABINET TABLE LIGHTS

Recessed led fixture to be installed in “technical bar” over the cabinet table

Fixture lenght can be customized

Optic diffused beam

180°

Diffuser

Opal polycarbonate

Color Rendering Index

CRI >85

Photobiological risk group

RG0

Electric power input

Not included external electronic power supply

Wiring

0,7m cable line included

Power factor

>0,9

Insulation Class

Class III

IP rate

IP 20

Housing

Anodized aluminum, grey natural color

Fixing

two inox springs

Weight, electric cable included


0,4 Kg

Lifetime

> 50.000

International Standards

EN 60598-1

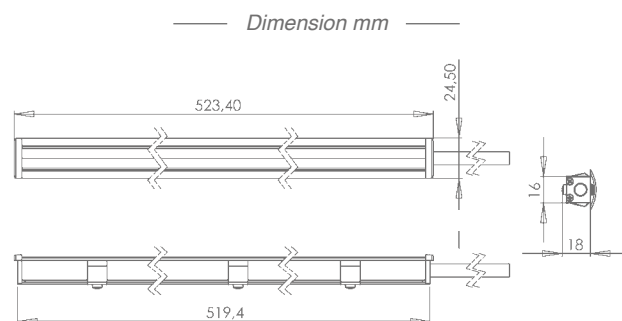

Operation Voltage	Operating ambient temp.	Housing Color	Control System	Primary Light	
				LED light color	Lumen
24V DC	-25° / + 45°	Anodized aluminium	On/Off	4000K	Max 1580 lm
				3000	





NOTE

[illegible]



Headquarter

FABAS LUCE S.p.A.

Via Luigi Talamoni, 75
20861 BRUGHERIO (MB) Italy
Tel. 0039 039 214 22 06
0039 039 89 06 91
Fax 0039 039 214 22 08
www.fabasluce.it
info@fabasluce.it

FABAS LUCE GmbH

Westring, 5
D-59759 ARNSBERG Germany
Tel. +49 29 32 / 8 90 16 60
Fax. +49 29 32 / 8 90 16 62
www.fabasluce.com
vertrieb@fabasluce.com

