
Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it



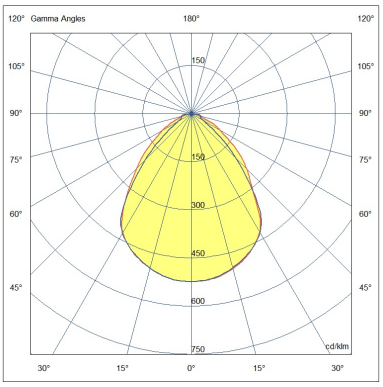

SKOS 35-120V

6589-24-002

Lighting features	
LED Characteristics	**SMD**
Light Source Lumen	**5861 lm**
Item Lumen	**4485 lm**
Light Source Efficiency	**190 lm/W @85°C**
Item Efficiency	**128 lm/W @85°C**
Color Temperature	**White 4000K**
Optics	**Prismatic**
Minimum CRI	**90**
SDCM	**3 STEP**
Photobiological Risk	**RG0**
UGR	**'<19**
Energy Efficiency Class	A↑G C

Electrical features	
Input Voltage	**120/277V AC 50/60Hz**
Total Absorbed Power	**35W**
Power Factor	**0,95**
Control System	**On/Off**
Driver	**Included**
Power Supply Type	**Costant Current**
Driver Output	**350mA**
Driver Input	**108-305V AC 50/60Hz**
Driver Protection	**Mains surge 1kV**
Through-Wiring	**No**

Mechanical features	
Housing material	**Metal frame**
Housing color	**White RAL 9003**
IP	**IP65**
IK	**04**
Cable gland, cable Ø min-max	**N°2 PG M20x1.5, Øext. cable: min 7mm - max 12mm**
Hole dimension	**580X580**
Operating ambient temperature	**-20°C / +45°C**
Storage ambient temperature	**-20°C / +60°C**
Item Dimensions	**610x610x120mm - 7kg**

Others	
Luminous Flux Maintenance	**L70 B50 >70000**
Driver Lifespan	**100000**
Packaging Dimensions	**650x650x150mm - 8.3kg**
International standard compliance	**EN 60598-1; EN60598-2-2; EN62471 + IEC TR 62778; EN55015; EN61547; EN61000-3-2; EN61000-3-3; EN 50581; EN IEC 63000**
Eancode	**8019282568728**
Made In	**Italy**
Insulation Class	**CL1**

CE

Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

