


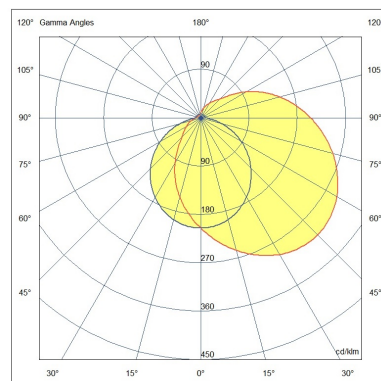

6593-54-001

Corner lamp for corridors.

Lighting features	
LED Characteristics	SMD
Number of LEDs	140
Light Source Lumen	1440 lm
Item Lumen	1000 lm
Light Source Efficiency	144 lm/W @85°C
Item Efficiency	84 lm/W @85°C
Color Temperature	White 4000K
Optics	180°
Typical CRI	82
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Energy Efficiency Class	A++ E

Electrical features	
Input Voltage	220/240V AC 50/60Hz
Total Absorbed Power	12W
Power Factor	>0,90
Control System	On/Off
Driver	Included
Power Supply Type	Costant Voltage
Driver Output	24V DC
Driver Input	198-264VAC 50/60Hz
Driver Protection	Mains surge 1kV; (L/N - PE) 2kV
Through-Wiring	Yes, in the lamp

Mechanical features	
Housing material	Aluminum frame and polycarbonate
Surface treatment	Polyester Painting
Housing color	White RAL 9016
IP	IP40
Diffuser / Protective shield	Opal polycarbonate flame rating V0 (UL94), UV resistant
Mounting	With 6 screws 4,2x12mm
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-25°C / +70°C
Item Dimensions	60x525x87mm - 1,5kg

Others	
Driver Lifespan	100.000 h with failure rate less than 10%
International standard compliance	EN 60598-1; EN 60598-2-1; EN62471 + IEC/TR 62778; EN55015; EN61547; EN61000-3-2; EN61000-3-3; EN62493; EN IEC 63000:2018
Made In	Italy
Insulation Class	CL1



