


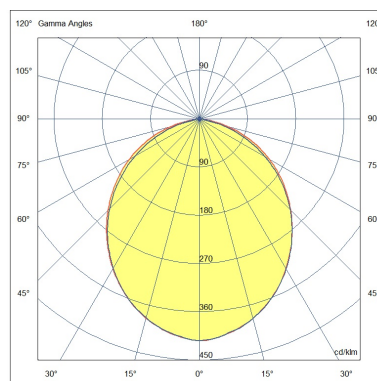

FIX DALI 10W WW 6597-12-956

Lighting features	
LED Characteristics	COB
Number of LEDs	1
Light Source Lumen	950 lm
Item Lumen	780 lm
Light Source Efficiency	105 lm/W @85°C
Item Efficiency	74 lm/W @85°C
Color Temperature	White 3000K
Optics	Opal
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Energy Efficiency Class	F

Electrical features	
Input Voltage	110/127V AC - 220/240V AC 50/60Hz
Total Absorbed Power	10W
Power Factor	> 0,9
Control System	DALI
Driver	Included
Power Supply Type	Costant Current
Driver Output	250mA
Driver Input	110-127V AC/ 220-240V AC 50/60Hz
Driver Protection	Mains surge 1kV; (L/N - PE) 2kV

Mechanical features	
Housing material	Aluminum frame
Housing color	White RAL 9003
IP	IP65 Front side
Diffuser / Protective shield	Opal acrylic
Mounting	Recessed
Hole dimension	82
Cable	Cm.35 - H05RN-F 2x1
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-25°C / +60°C
Item Dimensions	58mm Ø90mm - 0,2kg

Others	
Luminous Flux Maintenance	L90 B50 >54000
Driver Lifespan	>50000h
Packaging Dimensions	110x75x120mm - 0.3kg
International standard compliance	EN 60598-1; EN 60598-2-2; EN 62471 + IEC TR 62778; EN 55015; EN 61547; EN 61000-3-2; EN 61000-3-3; EN IEC 63000;
Eancode	8019282562061
Insulation Class	CL2



