


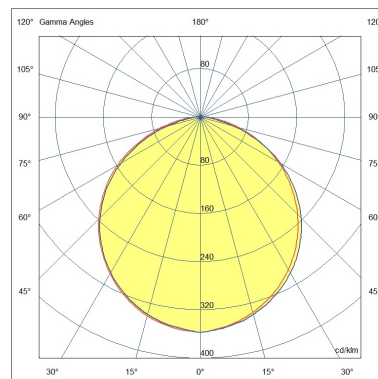

LSH

6744-02-002

Lighting fixture that uses a round profile in polycarbonate and aluminium, Ø25mm for direct lighting of rooms and walls. 360° rotation. IP65 Fixing with chromed brass brackets of different lengths to be ordered separately.

Lighting features	
LED Characteristics	SMD
Number of LEDs	28
Light Source Lumen	1370 lm
Item Lumen	970 lm
Light Source Efficiency	137 lm/W @85°C
Item Efficiency	97 lm/W @85°C
Color Temperature	White 3000K
Optics	180°
Typical CRI	85
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Energy Efficiency Class	A++ E

Electrical features	
Input Voltage	24V DC
Total Absorbed Power	10W
Control System	On/Off
Driver	Included
Power Supply Type	Costant Voltage
Driver Output	24V DC
Driver Input	220/240V~ 50/60Hz
Driver Protection	Mains surge 1kV; (L/N - PE) 2kV
Through-Wiring	No

Mechanical features	
Housing material	Aluminum frame and polycarbonate
IP	IP65
Diffuser / Protective shield	Transparent self-extinguishing polycarbonate
Mounting	With supports not included (see items: 6404-50-019, 020 or 021)
Cable	1,5m, H05RN-F 2x0,75
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-20°C / +60°C
Item Dimensions	439mm Ø25mm - 0,44kg

Others	
Luminous Flux Maintenance	L70 B50 80.000
Driver Lifespan	50000
Packaging Dimensions	0.6kg
International standard compliance	EN 60598-1; EN60598-2-1; EN62471 + IEC TR 62778; EN55015; EN61547; EN 50581
Eancode	8019282537199
Made In	Italy
Insulation Class	III CL3

CE

