
**Fabas Luce S.p.a.**
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it



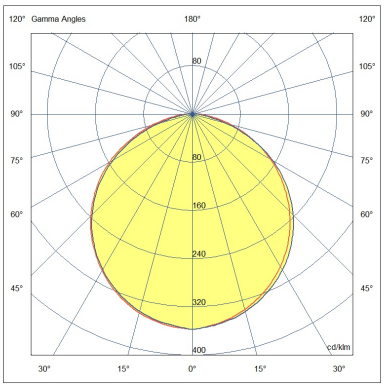


**LSH**

# 6744-04-005

| Lighting features | |
|---|---|
| LED Characteristics | **SMD** |
| Number of LEDs | **70** |
| Light Source Lumen | **3570 lm** |
| Item Lumen | **2150 lm** |
| Light Source Efficiency | **143 lm/W @85°C** |
| Item Efficiency | **86 lm/W @85°C** |
| Color Temperature | **White 4000K** |
| Optics | **180°** |
| Typical CRI | **85** |
| Minimum CRI | **80** |
| SDCM | **3 STEP** |
| Photobiological Risk | **RG0** |
| Energy Efficiency Class | A↑G E |

| Electrical features | |
|---|---|
| Input Voltage | **24V DC** |
| Total Absorbed Power | **25W** |

| Mechanical features | |
|---|---|
| Housing material | **Aluminum frame and polycarbonate** |
| IP | **IP65** |
| Diffuser / Protective shield | **Transparent self-extinguishing polycarbonate** |
| Mounting | **With n°2 INOX rubberized omega supports** |
| Cable | **3m, H07RN-F 2x1** |
| Operating ambient temperature | **-25°C / +45°C** |
| Storage ambient temperature | **-20°C / +60°C** |
| Item Dimensions | **1064mm Ø25mm - 0.94kg** |

| Others | |
|---|---|
| Luminous Flux Maintenance | **L70 B50 80.000** |
| Packaging Dimensions | **1kg** |
| International standard compliance | **EN 60598-1; EN60598-2-1; EN62471 + IEC TR 62778; EN55015; EN61547; EN IEC 63000** |
| Eancode | **8019282507291** |
| Made In | **Italy** |
| Insulation Class | **CL3** |

CE

**Fabas Luce S.p.a.**
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

