
Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it



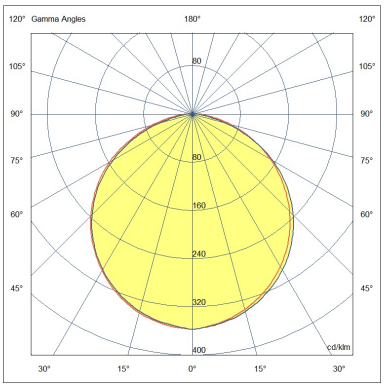

LSH

6744-04-005

Lighting features	
LED Characteristics	**SMD**
Number of LEDs	**70**
Light Source Lumen	**3570 lm**
Item Lumen	**2150 lm**
Light Source Efficiency	**143 lm/W @85°C**
Item Efficiency	**86 lm/W @85°C**
Color Temperature	**White 4000K**
Optics	**180°**
Typical CRI	**85**
Minimum CRI	**80**
SDCM	**3 STEP**
Photobiological Risk	**RG0**
Energy Efficiency Class	A↑G E

Electrical features	
Input Voltage	**24V DC**
Total Absorbed Power	**25W**

Mechanical features	
Housing material	**Aluminum frame and polycarbonate**
IP	**IP65**
Diffuser / Protective shield	**Transparent self-extinguishing polycarbonate**
Mounting	**With n°2 INOX rubberized omega supports**
Cable	**3m, H07RN-F 2x1**
Operating ambient temperature	**-25°C / +45°C**
Storage ambient temperature	**-20°C / +60°C**
Item Dimensions	**1064mm Ø25mm - 0.94kg**

Others	
Luminous Flux Maintenance	**L70 B50 80.000**
Packaging Dimensions	**1kg**
International standard compliance	**EN 60598-1; EN60598-2-1; EN62471 + IEC TR 62778; EN55015; EN61547; EN IEC 63000**
Eancode	**8019282507291**
Made In	**Italy**
Insulation Class	**CL3**

CE

Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

