


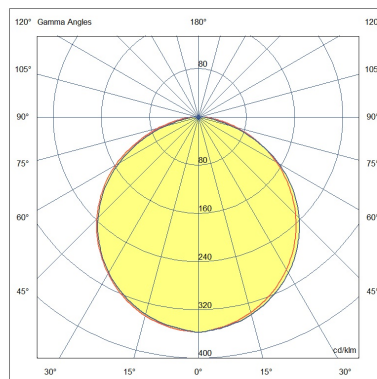

LSH 6744-04-016

Lighting features	
LED Characteristics	SMD
Number of LEDs	42
Light Source Lumen	2150 lm
Item Lumen	1290 lm
Light Source Efficiency	143 lm/W @85°C
Item Efficiency	86 lm/W @85°C
Color Temperature	White 4000K
Optics	180°
Typical CRI	85
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Energy Efficiency Class	A ↑ G E

Electrical features	
Input Voltage	24V DC
Total Absorbed Power	15W

Mechanical features	
Housing material	Aluminum frame and polycarbonate
IP	IP65
Diffuser / Protective shield	Transparent self-extinguishing polycarbonate
Mounting	With n°2 INOX rubberized omega supports
Cable	1m, H07RN-F 2x1
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-20°C / +60°C
Item Dimensions	639mm Ø25mm - 0,75kg

Others	
Luminous Flux Maintenance	L70 B50 80.000
Packaging Dimensions	0.8kg
International standard compliance	EN 60598-1; EN60598-2-1; EN62471 + IEC TR 62778; EN55015; EN61547; EN IEC 63000
Eancode	8019282550532
Made In	Italy
Insulation Class	CL3



