


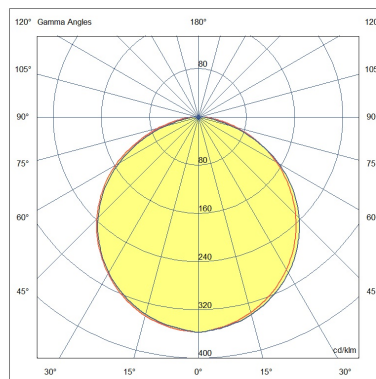

LSH

6744-04-017

tubular orientable white LED light for ceiling or wall

Lighting features	
LED Characteristics	SMD
Number of LEDs	42
Light Source Lumen	2150 lm
Item Lumen	1290 lm
Light Source Efficiency	143 lm/W @85°C
Item Efficiency	86 lm/W @85°C
Color Temperature	White 4000K
Optics	180°
Typical CRI	85
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Energy Efficiency Class	A++ E

Electrical features	
Input Voltage	24V DC
Total Absorbed Power	15W

Mechanical features	
Housing material	Aluminum frame and polycarbonate
IP	IP65
Diffuser / Protective shield	Transparent self-extinguishing polycarbonate
Mounting	With supports not included (see items: 6404-50-019, 020 or 021)
Cable	1m, H07RN-F 2x1
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-20°C / +60°C
Item Dimensions	639mm Ø25mm - 0,75kg

Others	
Luminous Flux Maintenance	L70 B50 80.000
Packaging Dimensions	0.8kg
International standard compliance	EN 60598-1; EN60598-2-1; EN62471 + IEC TR 62778; EN55015; EN61547; EN IEC 63000
Eancode	8019282557715
Made In	Italy
Insulation Class	III CL3



