


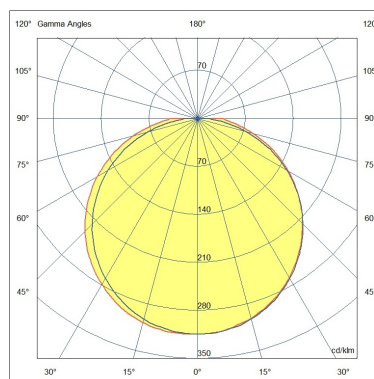

LLI

6747-04-009

Lighting features	
LED Characteristics	SMD
Number of LEDs	84
Light Source Lumen	864 lm
Item Lumen	560 lm
Light Source Efficiency	144 lm/W @85°C
Item Efficiency	93 lm/W @85°C
Color Temperature	White 4000K
Optics	120°
Typical CRI	82
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Energy Efficiency Class	A ↑ G E

Electrical features	
Input Voltage	24V DC
Total Absorbed Power	6W
Control System	On/Off
Driver	Included
Power Supply Type	Costant Voltage
Driver Output	24VDC
Driver Input	220/240V AC 50/60Hz
Driver Protection	Mains surge 1kV; (L/N - PE) 2kV
Through-Wiring	No

Mechanical features	
Housing material	Aluminum frame and polycarbonate
Surface treatment	Natural anodization
IP	IP40
Diffuser / Protective shield	Opal polycarbonate
Mounting	With 2 included stainless stell springs
Cable	1,5m - H05RN-F 2x0.75
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-25°C / +80°C
Item Dimensions	619x16x18,5mm - 0,2kg

Others	
Luminous Flux Maintenance	L70 B50 80000
Driver Lifespan	50000
Packaging Dimensions	0.3kg
International standard compliance	EN 60598-1; EN60598-2-1; EN62471 + IEC TR 62778; EN55015; EN61547; EN 50581;
Eancode	8019282537229
Made In	Italy
Insulation Class	III CL3

CE

