


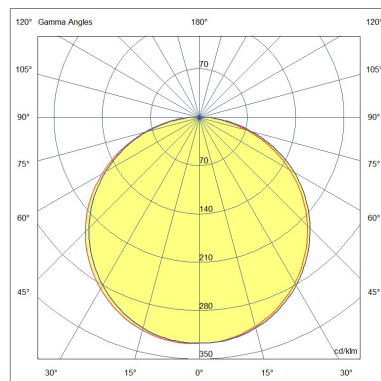

BIAV IP44 6775-04-006

Lighting features	
LED Characteristics	SMD
Number of LEDs	21
Light Source Lumen	1029 lm
Item Lumen	736 lm
Light Source Efficiency	137 lm/W @85°C
Item Efficiency	98 lm/W @85°C
Color Temperature	White 4000K
Optics	120°
Typical CRI	85
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Energy Efficiency Class	A

Electrical features	
Input Voltage	24V DC
Total Absorbed Power	7W
Driver	Not included

Mechanical features	
Housing material	Aluminum frame and polycarbonate
IP	IP44
Diffuser / Protective shield	Opal polycarbonate
Mounting	Recessed
Cable	45cm - H05RN-F 2x0.75
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-25°C / +80°C
Item Dimensions	314,4x18x24,5mm - 0,2kg

Others	
Luminous Flux Maintenance	L70 B50 80000
Packaging Dimensions	0.3kg
International standard compliance	EN 60598-1; EN60598-2-2; EN62471 + IEC TR 62778; EN 50581;
Eancode	8019282538950
Made In	Italy
Insulation Class	III CL3

CE

