


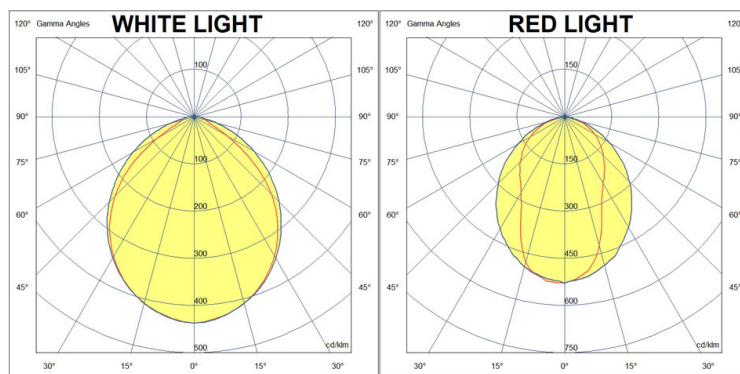

PEX CR

6807-94-004

EX white + RED LED light fixture in Explosion proof housing with four 1/2" NTP threaded holes for EX cable glands (not included) Installation hazardous areas: Zone 1/2 (Gases) - Zone 21/22 (Dusts) Classifications GROUP II - Category 2G/2D II 2 G Ex db IIB+H2 T5 Gb - II 2 D Ex tb IIIC T100°C Db

Lighting features		
	Light Source 1	Light Source 2
LED Characteristics	SMD	SMD
Number of LEDs	60	36
Light Source Lumen	3000 lm	
Item Lumen	2040 lm	52 lm
Light Source Efficiency	155 lm/W @85°C	
Item Efficiency	89 lm/W @85°C	11 lm/W @85°C
Color Temperature	White 4000K	Red Dominant Wavelength: >619nm <625nm
Optics	120°	120°
Minimum CRI	> 80	
Photobiological Risk	RG0	RG0
Energy Efficiency Class	A ↑ G D	

Electrical features		
	Electrical specifications 1	Electrical specifications 2
Input Voltage	100/240V AC 50/60Hz	100/240V AC 50/60Hz
Total Absorbed Power	23W	5W
Power Factor	> 0,9	0,4C
Control System	On/Off	On/Off
Driver	Included	Included
Power Supply Type	Costant Current	Costant Voltage
Driver Output	1050mA	24VDC
Driver Input	100-240V~ 50/60Hz	100/240V~ 50/60Hz
Driver Protection	Mains surge 4kV; (L/N - PE) 6KV	Mains surge 2Kv
Through-Wiring	Yes, in the lamp	Yes, in the lamp

Mechanical features	
Housing material	Marine grade copper free alluminium
Surface treatment	External epoxy powders
Housing color	Grey RAL 7040
IP	IP66
MIL-S 9001D Grade A- Class I – Type A	SI
Diffuser / Protective shield	Hight temperature resistant borosylicate glass
Mounting	With stainless steel brackets AISI 316L; fixing with 4 M10 screws
Operating ambient temperature	-30°C / +55°C
Storage ambient temperature	-30°C / +85°C
Item Dimensions	198x136x380mm - 8,6kg

Others	
Luminous Flux Maintenance	L80 100000h
Driver Lifespan	110000h
Packaging Dimensions	9.2kg
International standard compliance	EN 60598-1; EN 60598-2-1; IEC 60092-306; IEC 60533; EN 62471 + TR62778; EN 60079-0; EN60079-1; EN60079-7; EN60079-28; EN60079-31
Eancode	8019282561606
Made In	Italy
Insulation Class	⏏ CL1



