


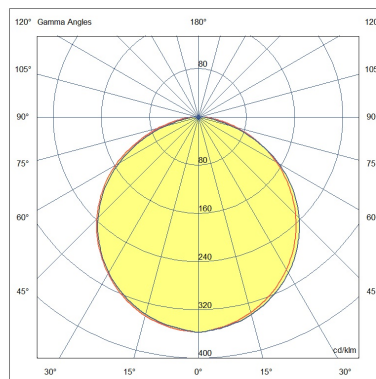

RSH

6822-07-002

tubular orientable RED LED light for ceiling or wall

Lighting features	
LED Characteristics	SMD
Number of LEDs	42
Item Lumen	130 lm
Color Temperature	Red Dominant Wavelength: >619nm <625nm
Optics	180°
Photobiological Risk	RG0

Electrical features	
Input Voltage	24V DC
Total Absorbed Power	3W

Mechanical features	
Housing material	Aluminum frame and polycarbonate
IP	IP65
Diffuser / Protective shield	Transparent self-extinguishing polycarbonate
Mounting	With supports not included (see items: 6404-50-019, 020 or 021)
Cable	1m, H07RN-F 2x1
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-20°C / +60°C
Item Dimensions	639mm Ø25mm - 0,75kg

Others	
Luminous Flux Maintenance	L70 B50 36000
Packaging Dimensions	0.8kg
International standard compliance	EN 60598-1; EN60598-2-1; EN62471 + IEC TR 62778; EN55015; EN61547; EN IEC 63000
Eancode	8019282557722
Made In	Italy
Insulation Class	III CL3



