


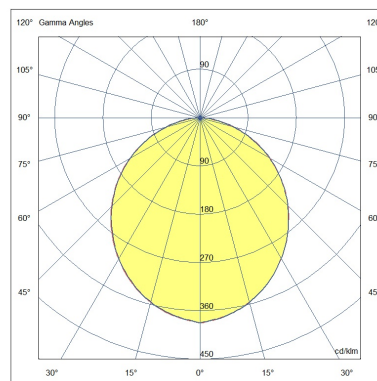

PSAR3 20W WW DALI

6823-02-302

Recessed fixture for living rooms

Lighting features	
LED Characteristics	SMD
Number of LEDs	48
Light Source Lumen	2522 lm
Item Lumen	1952 lm
Light Source Efficiency	141 lm/W @85°C
Item Efficiency	98 lm/W @85°C
Color Temperature	White 3000K
Optics	Opal
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Energy Efficiency Class	A ↑ G E

Electrical features	
Input Voltage	110/127V AC - 220/240V AC 50/60Hz - 176-280V DC
Total Absorbed Power	20W
Power Factor	> 0,9
Control System	DALI
Driver	Included
Power Supply Type	Costant Current
Driver Output	500mA
Driver Input	99-264V~ 50/60Hz; 176-280V DC
Driver Protection	Mains surge 1kV
Through-Wiring	Yes, in the power-supply box

Mechanical features	
Housing material	Aluminum frame and polycarbonate
Housing color	White RAL 9010
IP	IP44 Front side
Cable gland, cable Ø min-max	n°2 PG EMC M20x1.5, Øext. cable: min 9mm - max 16mm
Mounting	Recessed
Hole dimension	 180
Operating ambient temperature	-20°C / +45°C
Storage ambient temperature	-20°C / +60°C
Item Dimensions	55mm Ø207mm - 1.2kg

Others	
Luminous Flux Maintenance	L80 50000h
Driver Lifespan	100000
Packaging Dimensions	300x80x210mm - 1.5kg
International standard compliance	EN 60598-1; EN60598-2-2; EN62471 + IEC TR 62778; EN55015; EN61000-3-2; EN61000-3-3; EN 50581; IEC 60533
Eancode	8019282565970
Insulation Class	 CL1

CE

