
Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it



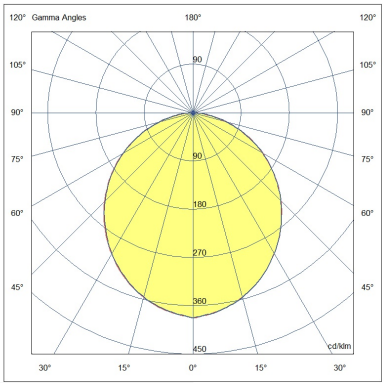

PSAR3 19W WW 115V ON/OFF BIANCO EM1,5H

6823-02-303

Lighting features	
LED Characteristics	**SMD**
Number of LEDs	**48**
Light Source Lumen	**2030 lm**
Item Lumen	**1600 lm**
Light Source Efficiency	**141 lm/W @85°C**
Item Efficiency	**84 lm/W @85°C**
Color Temperature	**White 3000K**
Optics	**Opal**
Minimum CRI	**80**
SDCM	**3 STEP**
Photobiological Risk	**RG0**
Emergency Function	**Yes**
Emergency Lumen	**560lm**
Energy Efficiency Class	A ↑ G **E**

Electrical features	
Input Voltage	**120/240V AC 50/60Hz**
Total Absorbed Power	**19W**
Power Factor	**> 0,9**
Control System	**On/Off**
Driver	**Included**
Power Supply Type	**Costant Current**
Driver Output	**400mA**
Driver Input	**108/264V AC 50/60Hz**

Mechanical features	
Housing material	**Aluminum frame and polycarbonate**
Housing color	**White RAL 9010**
IP	**IP44 Front side**
Cable gland, cable Ø min-max	**N°1 PG M20x1.5 EMC, Øext. cable: min 9mm - max 16mm; N°1 PG M16x1.5 for lamp**
Mounting	**Recessed**
Hole dimension	**260**
Cable	**1.0m Shielded cable (driver-lamp)**
Operating ambient temperature	**-20°C / +45°C**
Storage ambient temperature	**-20°C / +60°C**
Item Dimensions	**55mm Ø320mm - 3kg**

Others	
Luminous Flux Maintenance	**L80 50000h**
Driver Lifespan	**50000**
Packaging Dimensions	**345x345x120mm - 3.5kg**
International standard compliance	**EN 60598-1; EN60598-2-2; EN60598-2-22; EN62471 + IEC TR 62778; EN55015; EN61000-3-2; EN61000-3-3; EN 50581;**
Eancode	**8019282575313**
Insulation Class	**CL1**

Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

