




PSAR B 24 VDC

6823-89-254

Blue Light - Recessed fixture for living rooms

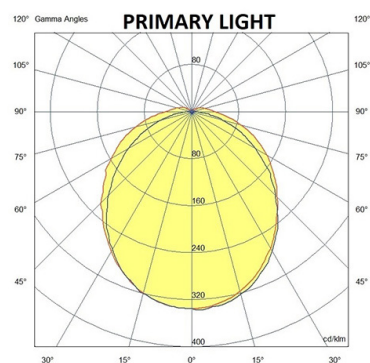

Lighting features	
LED Characteristics	SMD
Number of LEDs	6
Item Lumen	7 lm
Item Efficiency	12 lm/W @85°C
Color Temperature	Blue Dominant Wavelength: >465nm <471nm
Optics	Opal
Photobiological Risk	RG0

Electrical features	
Input Voltage	24V DC (min.22V / max.28V)
Total Absorbed Power	0,6W
Control System	On/Off

Mechanical features	
Housing material	Aluminum frame
Housing color	White RAL 9010
IP	IP44 Front side
Diffuser / Protective shield	Opal acrylic
Mounting	Recessed
Hole dimension	 125
Cable	Cm.20
Operating ambient temperature	-20°C / +45°C
Storage ambient temperature	-20°C / +60°C
Item Dimensions	49mm Ø142mm - 0,7kg

Others	
Luminous Flux Maintenance	L80 50000h
Packaging Dimensions	150x100x150mm - 0.35kg
International standard compliance	EN 60598-1; EN60598-2-2; EN62471 + IEC TR 62778; EN55015; EN61547; EN 50581;
Eancode	8019282513087
Insulation Class	 CL3



