


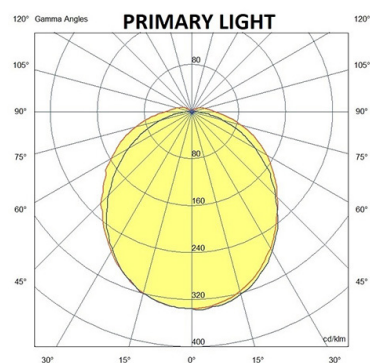

TVE-ST 22W NW RAL9010 EM 1.5H 115V

6868-54-071

Multipurpose white LED light fixture for inside and outside technical areas. Housing white RAL9010 - Emergency kit 1.5 hours in external box RAL7042

Lighting features	
LED Characteristics	SMD
Number of LEDs	60
Light Source Lumen	3250 lm
Item Lumen	2645 lm
Light Source Efficiency	185 lm/W @85°C
Item Efficiency	115 lm/W @85°C
Color Temperature	White 4000K
Optics	180°
Typical CRI	85
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Emergency Function	Yes, 1.5 hours of battery life
Emergency Lumen	25% - 660lm
Energy Efficiency Class	A ↑ C

Electrical features	
Input Voltage	120/277V AC 50/60Hz
Total Absorbed Power	23W
Power Factor	> 0,9
Control System	On/Off
Driver	Included
Power Supply Type	Costant Current
Driver Output	1050mA
Driver Input	115/277V~ 50/60Hz
Driver Protection	Mains surge 1kV
Through-Wiring	No

Mechanical features	
Housing material	Die-cast aluminum copper free EN AB 44100
Surface treatment	Polyester Painting
Housing color	White RAL 9010
IP	IP40
IK	10
MIL-S 9001D Grade A- Class I – Type A	NO
Diffuser / Protective shield	Opal polycarbonate flame rating V0 (UL94), UV resistant
Cable gland, cable Ø min-max	N°1 PG M20x1.5, Øext. cable: min 8mm - max 15mm, N°2 PG M16x1.5 for lamp and box
Mounting	With stainless steel brackets AISI 316L; fixing with M8 screws
Corrosion category	Salt Spray Resistance ASTM B117 >1500 hours
Cable	1m cable H05RN-F 3x1.0mmq (between box and lamp)
Operating ambient temperature	-25°C / +55°C
Storage ambient temperature	-25°C / +85°C
Item Dimensions	400x100x171mm - 5,0kg

Others	
Luminous Flux Maintenance	L80 100000h
Driver Lifespan	50000h
Packaging Dimensions	490x130x190mm - 5.4kg
International standard compliance	EN 60598-1; EN 60598-2-1; EN 62471 + IEC TR62778
Eancode	8019282579120
Made In	Italy
Insulation Class	CL1

