

Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

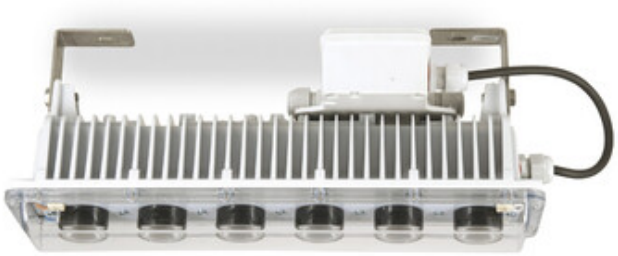

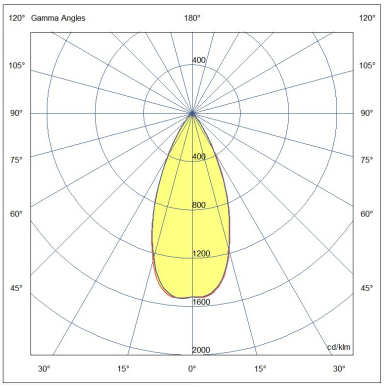

TOR 50

6941-54-624

Lighting features	
LED Characteristics	**Power LED**
Number of LEDs	**6**
Light Source Lumen	**6250 lm**
Item Lumen	**4152 lm**
Light Source Efficiency	**130 lm/W @85°C**
Item Efficiency	**77 lm/W @85°C**
Color Temperature	**White 4000K**
Optics	**65°**
Minimum CRI	**70**
SDCM	**5 STEP**
Photobiological Risk	**RG1**
Energy Efficiency Class	A G E

Mechanical features	
Housing material	**Die-cast aluminum structure**
Housing color	**White RAL 9010**
IP	**IP66**
IK	**10**
Diffuser / Protective shield	**Transparent self-extinguishing polycarbonate**
Cable gland, cable Ø min-max	**n°2 PG M20x1.5, Øext. cable: min 6mm - max 12mm**
Mounting	**With stainless steel brackets AISI 316L; fixing with M8 screws**
Corrosion category	**Salt Spray Resistance ASTM B117 >1500 hours**
Operating ambient temperature	**-40°C / +55°C**
Storage ambient temperature	**-40°C / +85°C**
Item Dimensions	**400x100x171mm - 2,6kg**

Electrical features	
Input Voltage	**100/240V AC 50/60Hz**
Total Absorbed Power	**54W**
Power Factor	**> 0,9**
Control System	**On/Off**
Driver	**Included**
Power Supply Type	**Costant Current**
Driver Output	**700mA**
Driver Input	**100/240V~ 50/60Hz**
Driver Protection	**Mains surge 4kV; (L/N - PE) 6KV**
Through-Wiring	**Yes, in the junction box**

Others	
Luminous Flux Maintenance	**L80 100000h**
Driver Lifespan	**100000h**
Packaging Dimensions	**490x130x190mm - 2.9kg**
International standard compliance	**EN 60598-1; EN 60598-2-5; EN62471 + IEC TR 62778; EN 50581; EN 55015; EN 61547-1; EN 61000-3-2; EN 61000-3-3; EN IEC 63000:2018**
Eancode	**8019282558088**
Made In	**Italy**
Insulation Class	**CL1**

CE

Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

