


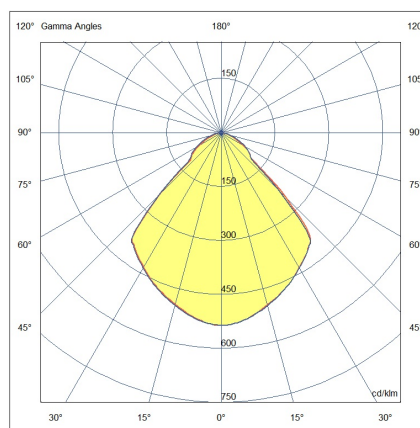

TON 100

6942-54-724

Powerful and robust LED floodlight - Compact and low weight housing One lens for each LED assure intense and precise light beam

Lighting features	
LED Characteristics	Power LED
Number of LEDs	12
Light Source Lumen	12840 lm
Item Lumen	12075 lm
Light Source Efficiency	135 lm/W @85°C
Item Efficiency	115 lm/W @85°C
Color Temperature	White 4000K
Optics	90°
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG1
Energy Efficiency Class	A ↑ G E

Electrical features	
Input Voltage	220/240V AC 50/60Hz
Total Absorbed Power	105W
Power Factor	> 0,95
Driver	Included
Power Supply Type	Costant Current
Driver Output	700mA
Driver Input	100/240V~ 50/60Hz
Driver Protection	Mains surge 6kV; (L/N - PE) 10kV

Mechanical features	
Housing material	Die-cast aluminum copper free EN AB 44100
Surface treatment	Polyester Painting
Housing color	White RAL 9016
IP	IP66 / IP67
IK	07
MIL-S 9001D Grade A- Class I – Type A	SI
Diffuser / Protective shield	Extra-clear tempered glass, 4mm thick
Cable gland, cable Ø min-max	M20x1.5 nickel plated brass - Ø cable: min. 7mm - max. 15mm
Mounting	With stainless steel bracket AISI 316L; fixing with 2 M12 screws
Corrosion category	Salt Spray Resistance ASTM B117 >1500 hours
Operating ambient temperature	-40°C / +55°C
Storage ambient temperature	-40°C / +80°C
Item Dimensions	370x142x319mm - 8,5kg

Others	
Luminous Flux Maintenance	L80 100000h
Driver Lifespan	100000h
Packaging Dimensions	470x180x470mm - 9.5kg
International standard compliance	EN 60598-1; EN 60598-2-5; Lloyd's Register:2020 + Notice 2021; EN 62471 + IEC TR 62778; EN IEC 63000:2018
Eancode	8019282570813
Made In	Italy
Insulation Class	CL1

CE

