


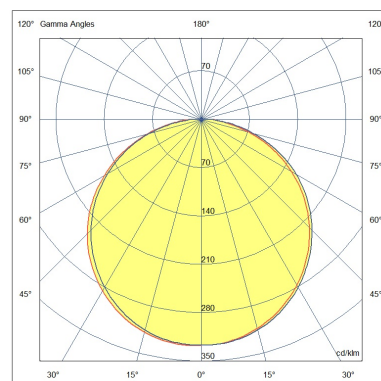

CLS 6948-02-001

Recessed led fixture to be installed in "technical bar" over the cabinet table

Lighting features	
LED Characteristics	SMD
Number of LEDs	35
Light Source Lumen	1715 lm
Item Lumen	1227 lm
Light Source Efficiency	137 lm/W @85°C
Item Efficiency	98 lm/W @85°C
Color Temperature	White 3000K
Optics	120°
Typical CRI	85
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Energy Efficiency Class	A++ E

Electrical features	
Input Voltage	24V DC
Total Absorbed Power	12W
Driver	Not included

Mechanical features	
Housing material	Aluminum frame and polycarbonate
IP	IP40
Diffuser / Protective shield	Opal polycarbonate
Cable	1m - H07RN-F 2x1
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-25°C / +80°C
Item Dimensions	523,4x18x24,5mm - 0,2kg

Others	
Luminous Flux Maintenance	L70 B50 80000
Packaging Dimensions	0.3kg
International standard compliance	EN 60598-1; EN60598-2-2; EN62471 + IEC TR 62778; EN 55015; EN 61547; EN IEC 63000
Eancode	8019282507598
Made In	Italy
Insulation Class	III CL3



