


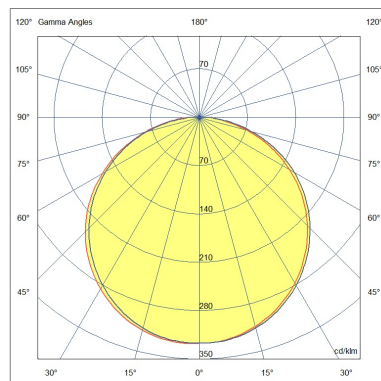

CTL

6949-02-001

Bed LED light. Integrated touch control for on/off memory switch and dimming.

Lighting features	
LED Characteristics	SMD
Number of LEDs	14
Light Source Lumen	686 lm
Item Lumen	490 lm
Light Source Efficiency	137 lm/W @85°C
Item Efficiency	98 lm/W @85°C
Color Temperature	White 3000K
Optics	120°
Typical CRI	85
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Energy Efficiency Class	A++ E

Electrical features	
Input Voltage	24V DC
Total Absorbed Power	5W
Control System	Yes, touch dimmer
Driver	Not included

Mechanical features	
Housing material	Aluminum frame and polycarbonate
IP	IP40
Diffuser / Protective shield	Opal polycarbonate
Mounting	Recessed
Cable	75cm - H07RN-F 2x1
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-25°C / +80°C
Item Dimensions	314,4x18x24,5mm - 0,2kg

Others	
Luminous Flux Maintenance	L70 B50 80000
Packaging Dimensions	0.3kg
International standard compliance	EN 60598-1; EN60598-2-2; EN62471 + IEC TR 62778; EN 55015; EN 61547; EN IEC 63000
Eancode	8019282507604
Made In	Italy
Insulation Class	III CL3



