


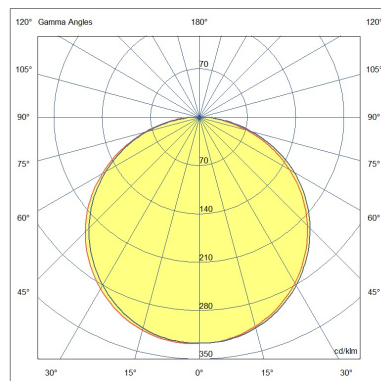

CTL

6949-02-002

Bed LED light. Integrated touch control for on/off memory switch and dimming. Dual luminous flux frontal and downward

Lighting features	
LED Characteristics	SMD
Number of LEDs	14
Light Source Lumen	686 lm
Item Lumen	490 lm
Light Source Efficiency	137 lm/W @85°C
Item Efficiency	98 lm/W @85°C
Color Temperature	White 3000K
Optics	120°
Typical CRI	85
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Energy Efficiency Class	A++ E

Electrical features	
Input Voltage	24V DC
Total Absorbed Power	5W
Control System	Yes, touch dimmer
Driver	Not included

Mechanical features	
Housing material	Aluminum frame and polycarbonate
IP	IP40
Diffuser / Protective shield	Opal polycarbonate
Mounting	Recessed
Cable	190cm - H07RN-F 2x1
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-25°C / +80°C
Item Dimensions	314,4x18x24,5mm - 0,2kg

Others	
Luminous Flux Maintenance	L70 B50 80000
Packaging Dimensions	0.3kg
International standard compliance	EN 60598-1; EN60598-2-2; EN62471 + IEC TR 62778; EN 55015; EN 61547; EN IEC 63000
Eancode	8019282507802
Made In	Italy
Insulation Class	III CL3



