
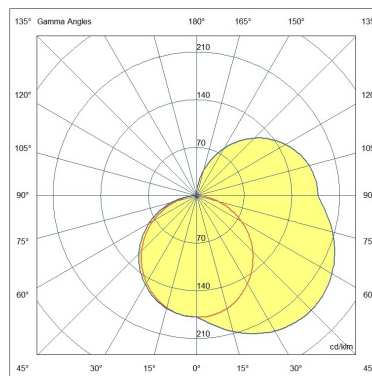


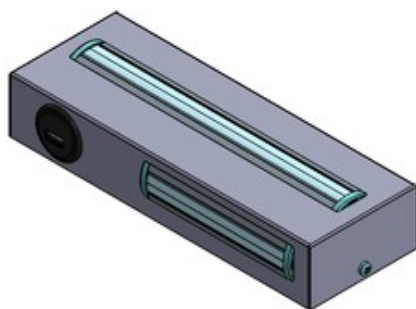

CTLP-USB 6949-02-006

Bed LED light with USB socket USB-A 5V DC max 3A for recharge. Integrated touch control for on/off memory switch and dimming. Dual luminous flux frontal and downward

Lighting features	
LED Characteristics	SMD
Number of LEDs	14
Light Source Lumen	686 lm
Item Lumen	490 lm
Light Source Efficiency	137 lm/W @85°C
Item Efficiency	82 lm/W @85°C
Color Temperature	White 3000K
Optics	120°
Typical CRI	85
Minimum CRI	80
SDCM	3 STEP
Photobiological Risk	RG0
Energy Efficiency Class	A

Electrical features	
Input Voltage	120/277V AC 50/60Hz
Total Absorbed Power	6W
Power Factor	> 0,9
Control System	Yes, touch dimmer
Driver	Included
Power Supply Type	Costant Voltage
Driver Output	24VDC
Driver Input	120/277V~ 50/60Hz
Driver Protection	Mains surge 2Kv
Through-Wiring	Yes, in the lamp

Mechanical features	
Housing material	Metal frame
Surface treatment	Polyester Painting
Housing color	White RAL 9016
IP	IP40
Diffuser / Protective shield	Opal polycarbonate
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-25°C / +80°C
Item Dimensions	240x44x85mm - 0,4kg

Others	
Luminous Flux Maintenance	L70 B50 80000
Packaging Dimensions	0.5kg
International standard compliance	EN 60598-1; EN60598-2-1; EN62471 + IEC TR 62778; EN 55015; EN 61547; EN61000-3-2; EN 61000-3-3; EN IEC 63000;
Eancode	8019282560173
Made In	Italy
Insulation Class	CL1



