**Fabas Luce S.p.a.**
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

**Alim1**

# 6951-00-001

| Electrical features | |
|---|---|
| Input Voltage | **100/240V AC 50/60Hz** |
| Total Absorbed Power | **40W** |
| Power Factor | **> 0,9** |
| Control System | **On/Off** |
| Power Supply Type | **Costant Voltage** |
| Driver Output | **24VDC** |
| Driver Input | **90/305V~ 50/60Hz** |
| Driver Protection | **Mains surge 2Kv** |

| Mechanical features | |
|---|---|
| Housing material | **Metal frame** |
| Surface treatment | **Painting** |
| Housing color | **White RAL 9010** |
| IP | **IP55** |
| Cable gland, cable Ø min-max | **Cable entry M20 cable gland: Ø6-12mm; Cable exit on connector: Ø7-9.5mm** |
| Item Dimensions | **550x97x300mm - 2,8kg** |

| Others | |
|---|---|
| Driver Lifespan | **50000** |
| Packaging Dimensions | **3kg** |
| International standard compliance | **EN 55015; EN 61000-3-2; EN 61000-3-3; EN 61347-1; EN 61347-2-13; EN 61547; EN IEC 63000** |
| Eancode | **8019282514329** |
| Insulation Class | **CL1** |
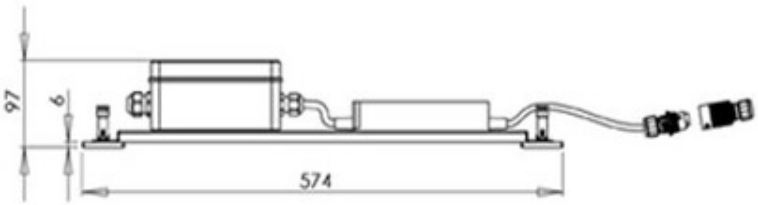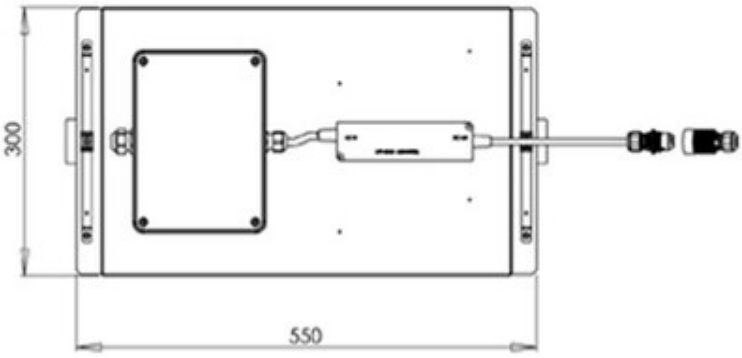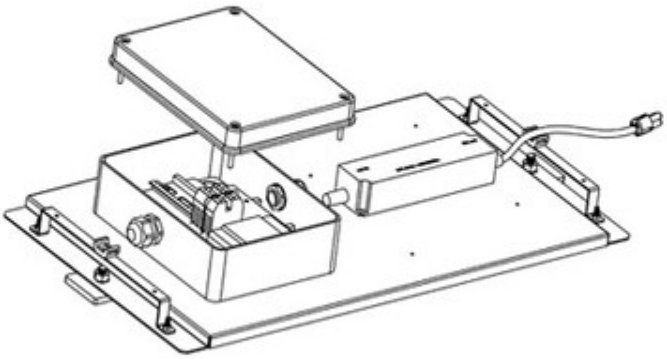
**Fabas Luce S.p.a.**
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it