Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

Alim1

6951-00-001

Electrical features	
Input Voltage	**100/240V AC 50/60Hz**
Total Absorbed Power	**40W**
Power Factor	**> 0,9**
Control System	**On/Off**
Power Supply Type	**Costant Voltage**
Driver Output	**24VDC**
Driver Input	**90/305V~ 50/60Hz**
Driver Protection	**Mains surge 2Kv**

Mechanical features	
Housing material	**Metal frame**
Surface treatment	**Painting**
Housing color	**White RAL 9010**
IP	**IP55**
Cable gland, cable Ø min-max	**Cable entry M20 cable gland: Ø6-12mm; Cable exit on connector: Ø7-9.5mm**
Item Dimensions	**550x97x300mm - 2,8kg**

Others	
Driver Lifespan	**50000**
Packaging Dimensions	**3kg**
International standard compliance	**EN 55015; EN 61000-3-2; EN 61000-3-3; EN 61347-1; EN 61347-2-13; EN 61547; EN IEC 63000**
Eancode	**8019282514329**
Insulation Class	**CL1**
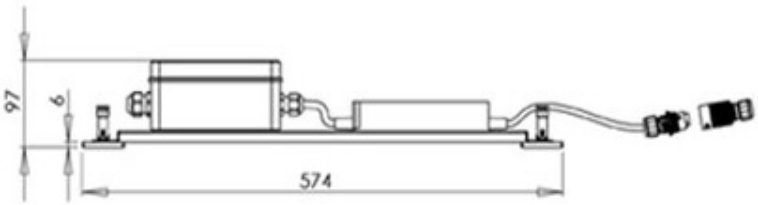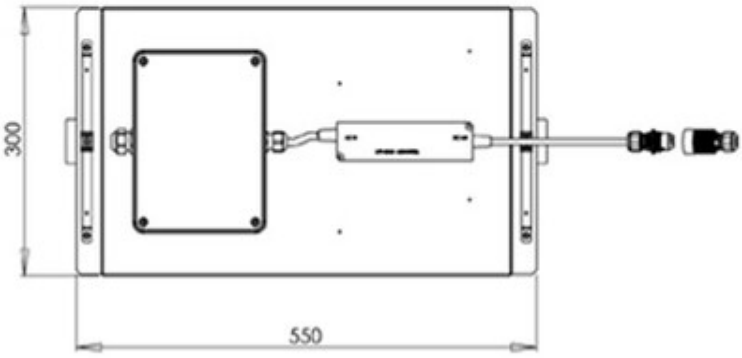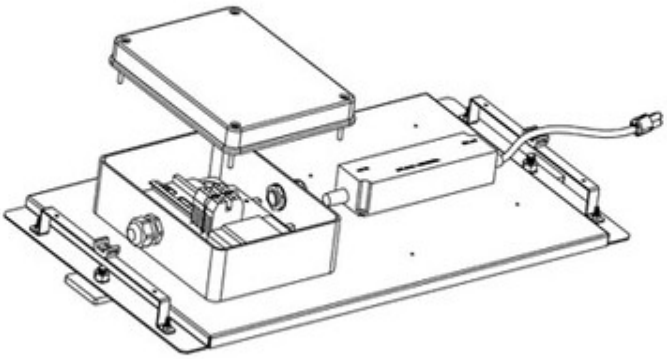
Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it