


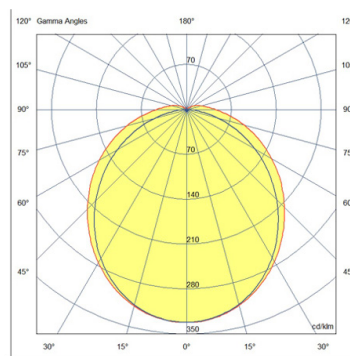

## STARFIX 20-630 INOX

# 6955-54-101

20 W outdoor open deck LED fixture. Stainless steel AISI 316L housing – length 630 mm

| Lighting features       |                       |
|-------------------------|-----------------------|
| LED Characteristics     | <b>SMD</b>            |
| Number of LEDs          | <b>140</b>            |
| Light Source Lumen      | <b>3065 lm</b>        |
| Item Lumen              | <b>2624 lm</b>        |
| Light Source Efficiency | <b>163 lm/W @85°C</b> |
| Item Efficiency         | <b>122 lm/W @85°C</b> |
| Color Temperature       | <b>White 4000K</b>    |
| Optics                  | <b>180°</b>           |
| Typical CRI             | <b>92</b>             |
| Minimum CRI             | <b>90</b>             |
| SDCM                    | <b>3 STEP</b>         |
| Photobiological Risk    | <b>RG0</b>            |
| Energy Efficiency Class | <b>A++ D</b>          |

| Electrical features  |                                        |
|----------------------|----------------------------------------|
| Input Voltage        | <b>220/240V 0-50/60Hz</b>              |
| Total Absorbed Power | <b>21W</b>                             |
| Power Factor         | <b>&gt;0,95</b>                        |
| Control System       | <b>On/Off</b>                          |
| Driver               | <b>Included</b>                        |
| Power Supply Type    | <b>Costant Current</b>                 |
| Driver Output        | <b>500mA</b>                           |
| Driver Input         | <b>220-240V 0-50/60Hz</b>              |
| Driver Protection    | <b>Mains surge 1kV; (L/N - PE) 2kV</b> |
| Through-Wiring       | <b>Yes, in the lamp</b>                |

| Mechanical features           |                                                                                       |
|-------------------------------|---------------------------------------------------------------------------------------|
| Housing material              | <b>Stainless steel AISI 316L</b>                                                      |
| Surface treatment             | <b>Polyester Painting</b>                                                             |
| Housing color                 | <b>White RAL 9016</b>                                                                 |
| IP                            | <b>IP66 / IP67</b>                                                                    |
| IK                            | <b>10</b>                                                                             |
| Diffuser / Protective shield  | <b>Opal polycarbonate flame rating V0 (UL94), UV resistant</b>                        |
| Cable gland, cable Ø min-max  | <b>M20 nickel plated brass - Cable Ø 8-15mm</b>                                       |
| Clips                         | <b>Yes, Stainless steel AISI 316SS</b>                                                |
| Mounting                      | <b>M8 treaded pin with nut on preinstalled bushing, all stainless steel AISI 316L</b> |
| Operating ambient temperature | <b>-25°C / +55°C</b>                                                                  |
| Storage ambient temperature   | <b>-25°C / +70°C</b>                                                                  |
| Item Dimensions               | <b>629x82x133mm - 2,4kg</b>                                                           |

| Others                            |                                                                                                              |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------|
| Luminous Flux Maintenance         | <b>L80 B10 &gt;75.000</b>                                                                                    |
| Driver Lifespan                   | <b>100.000 h with failure rate less than 10%</b>                                                             |
| Packaging Dimensions              | <b>2.7kg</b>                                                                                                 |
| International standard compliance | <b>EN 60598-1; EN 60598-2-1; Lloyd's Register: 2020 + Notice 2021; EN 62471 + TR62778; EN IEC 63000:2018</b> |
| Eancode                           | <b>8019282022589</b>                                                                                         |
| Made In                           | <b>Italy</b>                                                                                                 |
| Insulation Class                  | <b>CL1</b>                                                                                                   |



