


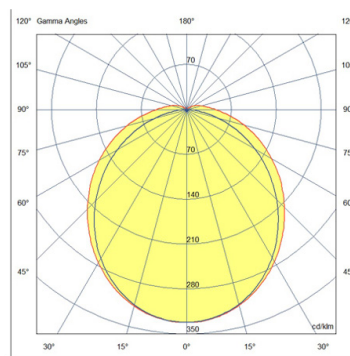

STARFIX 40-630 NW 9016 EM.3H INOX PG EMC

6955-54-118

38W outdoor open deck LED fixture. Stainless steel AISI 316L housing – length 630 mm - EMERGENCY 3h

Lighting features	
LED Characteristics	SMD
Number of LEDs	224
Light Source Lumen	5622 lm
Item Lumen	4679 lm
Light Source Efficiency	163 lm/W @85°C
Item Efficiency	123 lm/W @85°C
Color Temperature	White 4000K
Optics	180°
Typical CRI	92
Minimum CRI	90
SDCM	3 STEP
Photobiological Risk	RG0
Emergency Function	yes
Emergency Lumen	1170lm (25% of nominal flow)
Energy Efficiency Class	A ↑ D

Electrical features	
Input Voltage	220/240V 0-50/60Hz
Total Absorbed Power	38W
Power Factor	>0,90
Control System	On/Off
Driver	Included
Power Supply Type	Costant Current
Driver Output	800mA
Driver Input	220-240V 0-50/60Hz
Driver Protection	Mains surge 4kV; (L/N - PE) 4KV
Through-Wiring	Yes, in the lamp

Mechanical features	
Housing material	Stainless steel AISI 316L
Surface treatment	Polyester Painting
Housing color	White RAL 9016
IP	IP66 / IP67
IK	10
Diffuser / Protective shield	Opal polycarbonate flame rating V0 (UL94), UV resistant
Cable gland, cable Ø min-max	N°2 PG M20x1.5 EMC INOX, Øext. cable: min 9mm - max 16mm
Clips	Yes, Stainless steel AISI 316SS
Mounting	M8 treaded pin with nut on preinstalled bushing, all stainless steel AISI 316L
Operating ambient temperature	-25°C / +55°C (0-55°C for battery temperature)
Storage ambient temperature	-25°C / +70°C
Item Dimensions	629x82x133mm - 3,4kg

Others	
Luminous Flux Maintenance	L80 B10 >75.000
Driver Lifespan	100.000 h with failure rate less than 10%
Packaging Dimensions	645x120x190mm - 4kg
International standard compliance	EN 60598-1; EN 60598-2-1; EN62471+IEC TR 62778; EN60092-306; EN55015; EN61000-3-2; EN61000-3-3; EN IEC 63000:2018
Eancode	8019282576617
Made In	Italy
Insulation Class	CL1



