
Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it



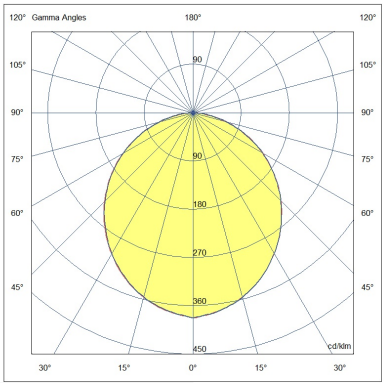

RTL 18W CCT EM 3h

6879-20-959

Recessed ceiling light with rechargeable battery. In the event of a blackout, it automatically activates and keeps the light always on or turns it on if it was off. 3 hours autonomy. Normal operation with on and off with a switch on the power line. External green LED indicator for power and charged battery, installation possible only separate from the lamp body. Estimated battery life: 4 years T amb +5/+45°C; 6 years T amb +5/+35 °C; 8 years T amb +5/+25°C

Lighting features	
LED Characteristics	**SMD**
Number of LEDs	**72+72**
Light Source Lumen	**1974 lm**
Item Lumen	**1480 lm**
Light Source Efficiency	**124 lm/W @85°C**
Item Efficiency	**74 lm/W @85°C**
Color Temperature	**CCT (2700K 3000K 4000K)**
Optics	**Opal**
Minimum CRI	**90**
SDCM	**3 STEP**
Photobiological Risk	**RG0**
Emergency Function	**YES, 3h - LiFePO4 Battery**
Emergency Lumen	**220 lm**
Energy Efficiency Class	A G E

Electrical features	
Input Voltage	**220/240V AC 50/60Hz**
Total Absorbed Power	**20W**
Power Factor	**> 0,9**
Control System	**On/Off**
Driver	**Included**
Power Supply Type	**Costant Current**
Driver Output	**450mA (65mA Emergenza)**
Driver Input	**220/240V~ 50/60Hz**
Driver Protection	**Mains surge 1kV; (L/N - PE) 2kV**
Through-Wiring	**Yes, in the external emergency box**

Mechanical features	
Housing material	**Aluminum frame and polycarbonate**
Housing color	**White RAL 9010**
IP	**IP54 Front side**
IK	**06**
Diffuser / Protective shield	**Opal policarbonate**
Mounting	**Recessed**
Hole dimension	**150**
Operating ambient temperature	**0°C / +45°C**
Storage ambient temperature	**12 mesi +5°C / +25°C**
Item Dimensions	**100mm Ø170mm - 1.22kg**

Others	
Luminous Flux Maintenance	**L80 50000h**
Driver Lifespan	**100000**
Packaging Dimensions	**345x345x120mm - 2.5kg**
International standard compliance	**EN 60598-1; EN60598-2-2;EN60598-2-22; EN62471 + IEC TR 62778; EN55015; EN61000-3-2; EN61000-3-3; EN 50581;**
Eancode	**8019282570431**
Insulation Class	**CL2**

CE

Fabas Luce S.p.a.
Via Luigi Talamoni 75,
20861 BRUGHERIO MB - ITALY
Tel. +39 039 890691
Fax. +39 039 2142208
info@fabasluce.it - www.fabasluce.it

