


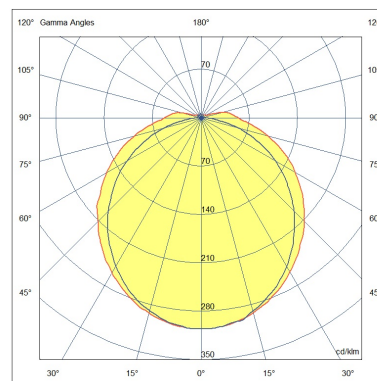

GALCOR-R 14W

6953-10-854

LED Light fixture USPHS compliant for galley, laundry, NBCR decontamination station

Lighting features	
LED Characteristics	SMD
Number of LEDs	144
Item Lumen	162 lm
Item Efficiency	11.6 lm/W @85°C
Color Temperature	Red Dominant Wavelength: >619nm <625nm
Optics	180°
Photobiological Risk	RG0

Electrical features	
Input Voltage	220/240V AC 50/60Hz
Total Absorbed Power	14W
Power Factor	> 0,6
Control System	On/Off
Driver	Included
Power Supply Type	Costant Voltage
Driver Output	24VDC
Driver Input	220/240V 50/60Hz
Driver Protection	Mains surge 1kV; (L/N - PE) 2kV
Through-Wiring	Yes, in the lamp

Mechanical features	
Housing material	Stainless steel AISI 316L
IP	IP66 / IP67
Diffuser / Protective shield	Opal polycarbonate flame rating V0 (UL94), UV resistant
Cable gland, cable Ø min-max	N°2 PG M20x1.5, Øext. cable: min 6mm - max 12mm
Mounting	With 6 screws 4,2x12mm
Operating ambient temperature	-25°C / +45°C
Storage ambient temperature	-25°C / +80°C
Item Dimensions	147x607x50mm - 1,9kg

Others	
Luminous Flux Maintenance	L80 100000h
Driver Lifespan	50000h
Packaging Dimensions	170x660x105mm - 2.3kg
International standard compliance	EN60598-1; EN60598-2-1; IEC60092-306; IEC60533; EN62471 + TR62778; EN 61547
Eancode	8019282559948
Made In	Italy
Insulation Class	CL1



